


**DIGITUS colored pigtails, LC OM3 50/125  $\mu$ , Simplex**

DK-25332-02/3 4016032263005

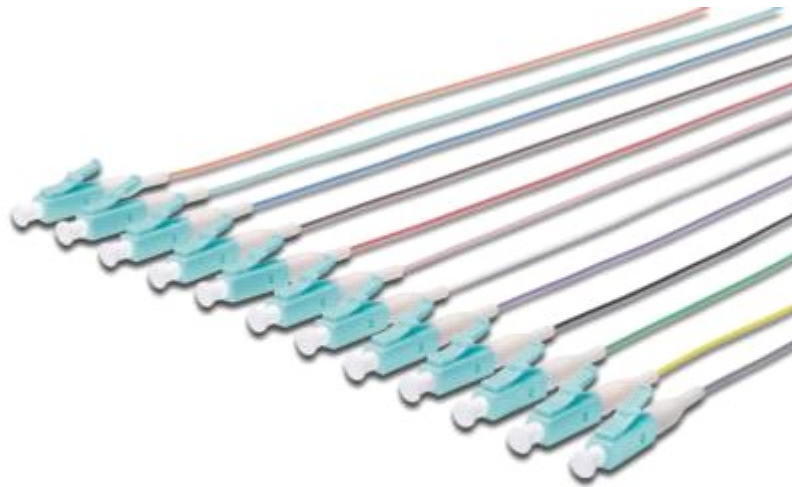

**DIGITUS LC Fiber PigTail , Loose Buffer, 50/125  $\mu$   
12 Pcs., Color code DIN IEC 304 Length 2m, Class OM3**

**Best performance and link quality for your network**

- 
- 1 LC simplex pigtail, OM3 50/125  $\mu$  2m
  - 1 Standard connector acc. IEC 61754-4 2002
  - 1 Operating temperature: -25°C ... +80°C
  - 1 Storage temperature: -20°C ... +65°C
  - 1 Insertion loss MM PC: max. 0,4dB
  - 1 Return loss MM PC: > 25dB
  - 1 Zirconia ceramic ferrule
  - 1 Secondary coating dimensions:  $\varnothing$  0,9  $\pm$  0,1mm
  - 1 Primary coating: Acrylate;  $\varnothing$  250 $\pm$  15 $\mu$ m
  - 1 Semi-tight buffer
  - 1 Colored buffer, according to IEC 304 in the colors white, violet, turquoise, black, red, pink, orange, gray, green, yellow, brown, blue
  - 1 12 pcs in package
-

**DIGITUS colored pigtails, LC OM3 50/125 μ, Simplex**

DK-25332-02/3 4016032263005

→ **Logistics**

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	150	6,22	38,00	30,00	29,00	33060,00
Packaging Unit Inside	1	0,04	30,00	20,00	1,00	600,00
Packaging Unit Single	1	0,04	15,00	15,00	2,00	450,00
Net single without Packaging	1	0,00	0,00	0,00	0,00	0,00

→ **Packaging type**



Country of origin: China