THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS - in. [mm]				
		L ± .02 [0,5]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .02 [0,5]	H ± .01 [0,3]
E14-6LFB	#6	.70 [17,78]	.25 [6,35]	.22 [5,59]	.48 [12,19]	.15 [3,81]
E14-8LFB	#8	.77 [19,56]	.29 [7,37]	.27 [6,86]	.53 [13,46]	.17 [4,32]
E14-10LFB	#10	.77 [19,56]	.33 [8,38]	.27 [6,86]	.53 [13,46]	.20 [5,08]

UL & CSA TOOLS
CT-100A CT-200 CT-600-A (CT-570CH) CT-1570 CT-2500 (CT-2570CH)

PANDUIT APPROVED TOOLS
CT-160 CT-260

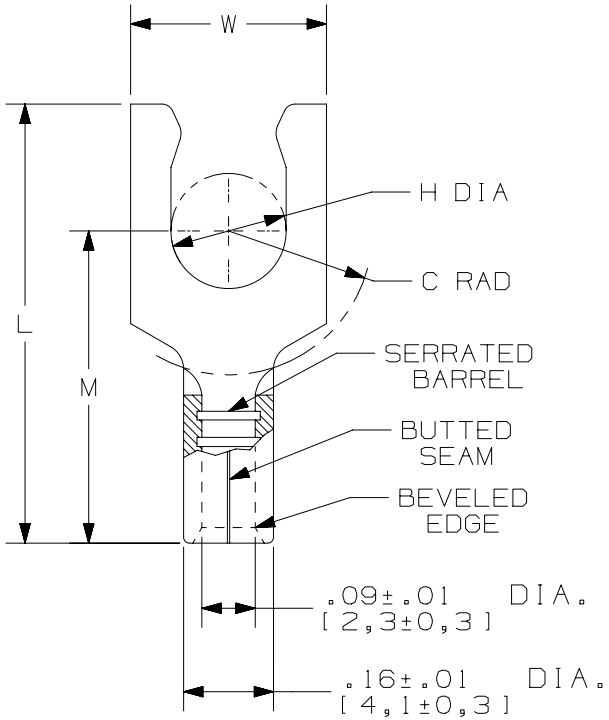

NOTES:

1. UL LISTED & CSA CERTIFIED FOR:
   A. #16-14 AWG SOLID OR STRANDED COPPER WIRE
   B. 302°F [150°C] MAX TEMP RATING
   C. 2000 VOLTS MAX
2. MATERIAL:
   A. STAMPING - .03" [0,8] THK COPPER, TIN PLATED
3. WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1mm $^{+0,8}_{-0}$]
4. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

c UL us LISTED 587H E52164

CSA CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

TITLE

STRONGHOLD LOCKING FORK TERMINAL
NON-INSULATED, BUTTED SEAM #16-14 AWG

CUSTOMER DRAWING

ITEM REVISION NAME: 00123SHR/00

DATASET FILE NAME: 00123SHR/00

PANDUIT

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ±
.XX ± ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTE 3

DRAWING NUMBER: SH41054

DRAWN BY	DATE	CHK	SCALE		SIZE
JHNU	2/18	TMR	NTS	SHT 1 OF 1	A

D10100DA/16