


CODE	DIM "M" MATING LENGTH	CONTACT TYPE
PC	[2.34]	POWER
PA	[1.07]	POWER
H	[N/A]	SIGNAL
G	[N/A]	SIGNAL
F	[N/A]	SIGNAL
E	[N/A]	SIGNAL
HA	[N/A]	HOLD-DOWN
X	[N/A]	OMITTED

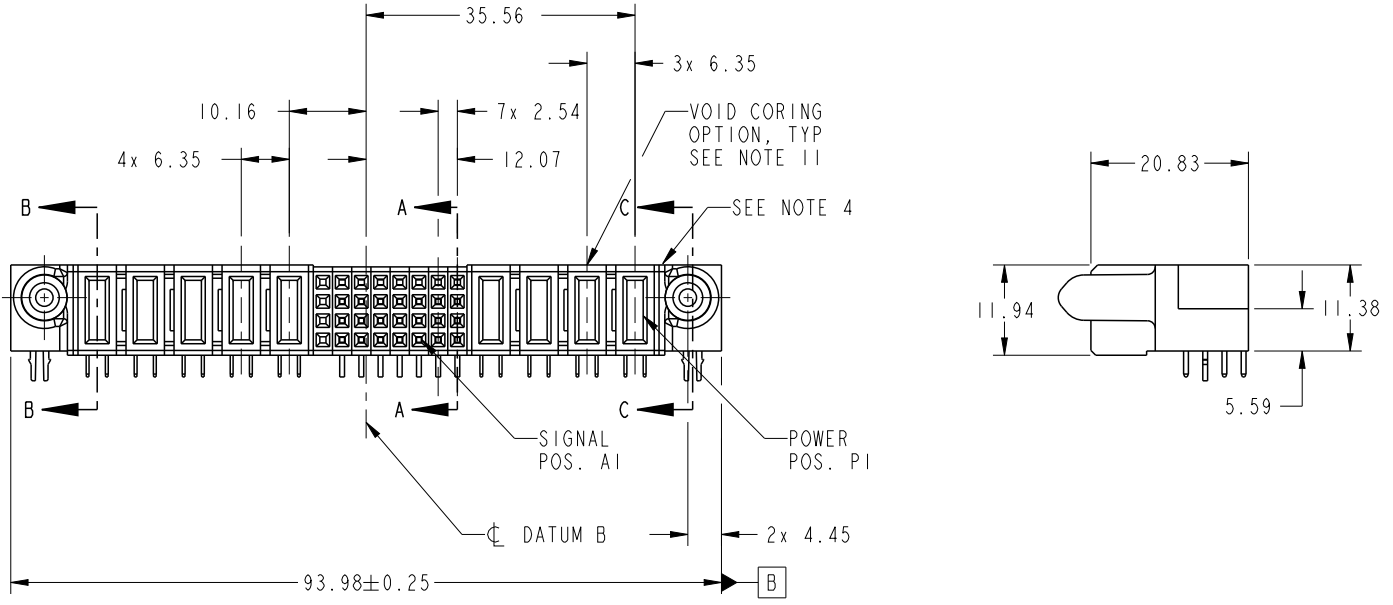


Copyright FCI.

spec ref	SEE NOTES			dr	Ruan MT	2014/02/18	projection 	MM ←→	size	A4	scale	1:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Luo Weller	2014/05/03			ecn no	-		
SEE NOTES				chr	-	-			rel level	Released		
surface	linear	0.X	±0.50	FCI	www.fci.com	title	4P + 32S + 5P R/A SOLDER RECEPTACLE	dwg no	51770-054	rev	A	
		0.XX	±0.25									
		0.XXX	±0.10									
	angular	0°	±2°	cat. no.	Product - Customer Drw			sheet 1 of 4				


PrdE File - REV C - 2009-06-09

PRODUCT NUMBER


51770-054__
NOTE 3

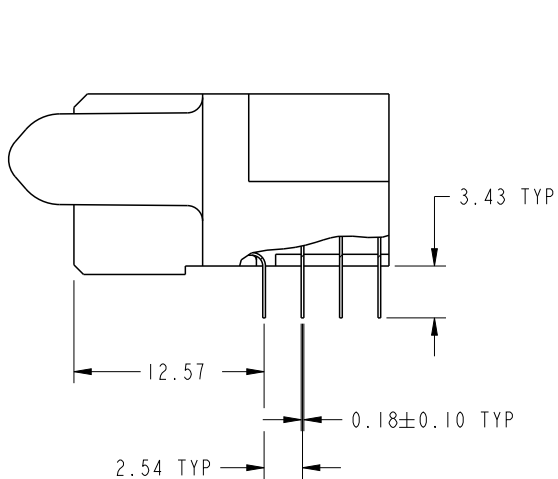

BROKEN-OUT SECTION A-A
SCALE 2:1

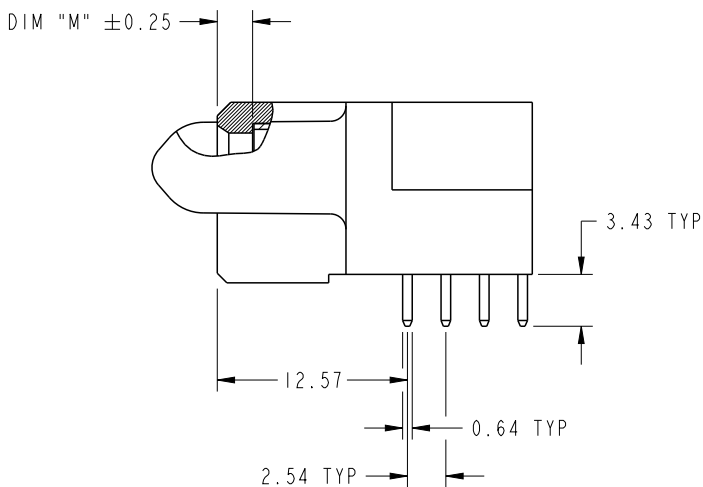

BROKEN-OUT SECTION B-B
SCALE 2:1

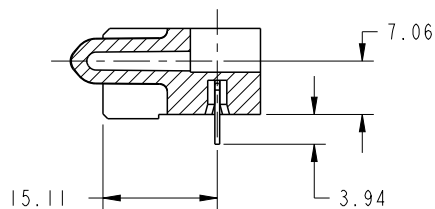





SECTION C-C

dr	Ruan MT	2014/02/18	projection 	MM 	size	A4	scale	1:1
eng	Luo Weller	2014/05/03			ecn no	-		
chr	-	-			rel level	Released		
appr	Pei-Ming Zheng	2014/05/03	product family	PwrBlade	rev	A		
		title 4P + 32S + 5P R/A SOLDER RECEPTACLE	dwg no 51770-054	cat. no. Product - Customer Drw	sheet 2 of 4			

PRODUCT NUMBER

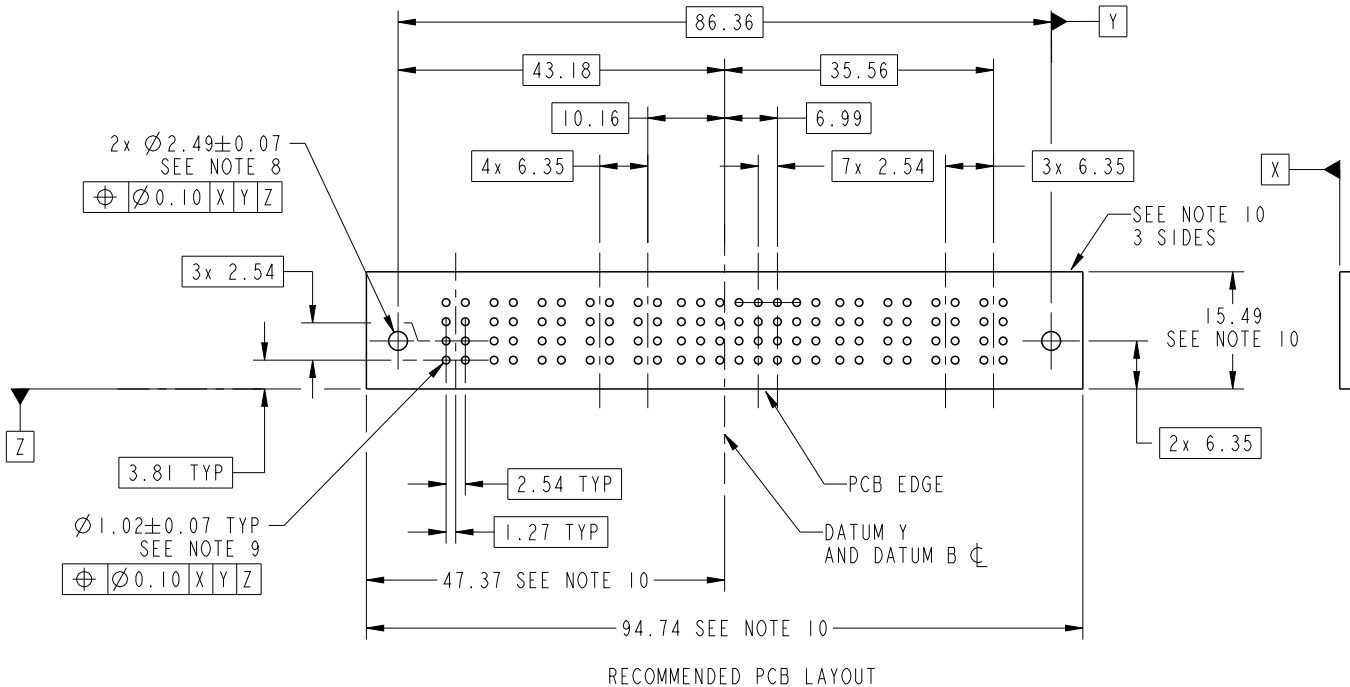51770-054__
NOTE 3



dr	Ruan MT	2014/02/18	projection 	MM 	size	A4	scale	1:1
eng	Luo Weller	2014/05/03			ecn no	-		
chr	-	-			rel level	Released		
appr	Pei-Ming Zheng	2014/05/03	product family	PwrBlade				
		title 4P + 32S + 5P R/A SOLDER RECEPTACLE	dwg no 51770-054	rev A				
www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 4			

PRODUCT NUMBER

51770-054--
NOTE 3

NOTES:

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M, 1994 UNLESS OTHERWISE SPECIFIED.

CONNECTOR NOTES:

- 2. HOUSING MATERIAL: UL 94 V-0 GLASS FILLED HIGH-TEMP THERMOPLASTIC
POWER CONTACT MATERIAL: COPPER ALLOY
SIGNAL PIN MATERIAL: COPPER ALLOY
- 3. SEE ITEM 5 & 6 IN PRINT 10064183 FOR PLATING SPEC OF 51770-054 AND 51770-054LF RESPECTIVELY.

4. MANUFACTURER'S NAME, DATE CODE AND OPTIONAL P/N TO APPEAR ON THIS SURFACE. THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.

5. PRODUCT SPECIFICATION GS-12-149.
APPLICATION SPECIFICATION BUS-20-067.

6. PACKAGED IN TRAYS.

PCB NOTES:

7. ALL HOLE DIAMETERS ARE FINISHED HOLE SIZE.

8. MOUNTING HOLES, WHERE APPLICABLE, ARE UNPLATED.

9. $\varnothing 1.151 \pm 0.025$ DRILLED HOLES PLATED WITH
0.008 MIN SnPb OR Sn OVER 0.03
TO 0.08 Cu PLATING TO ACHIEVE
 $\varnothing 1.02 \pm .07$ HOLE.

10. CONNECTOR KEEP-OUT ZONE.

11. THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Ruan MT	2014/02/18	projection 	MM 	size	A4	scale	1:1
eng	Luo Weller	2014/05/03			ecn no	-		
chr	-	-			product family	PwrBlade	rel level	Released
appr	Pei-Ming Zheng	2014/05/03			title 4P + 32S + 5P R/A SOLDER RECEPTACLE	dwg no 51770-054	rev A	
www.fci.com		cat. no.	Product - Customer Drw			sheet 4 of 4		