

Type 1/2 surge protection plug - VAL-MS-T1/T2 1000DCPV-UD-ST - 2801231


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Replacement plug for PV arrester combinations from the VAL-MS-T1/T2 1000DC-PV-... product range



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 749220
GTIN	4046356749220

Technical data

Dimensions

Height	52.4 mm
Width	17.5 mm
Depth	55.3 mm
Horizontal pitch	1 Div.

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	60g (Half sine/11 ms/3x #X#Y#Z)
Vibration (operation)	7.5g (5-500 Hz/2.5 h/XYZ)

General

IEC test classification	PV T1
	PV T2

Type 1/2 surge protection plug - VAL-MS-T1/T2 1000DCPV-UD-ST - 2801231

Technical data

General

SPD failure behavior	OCM (Open-circuit mode)
Installation location	Inside
Accessibility	Accessible
Installation location of the disconnect device	Internal
Mounting type	On base element
Color	jet black RAL 9005
Housing material	PA 6.6-FR
Degree of pollution	2
Flammability rating according to UL 94	V-0
Surge protection fault message	optical

Additional descriptions

Note	The UL data applies for the series connection of two surge protective devices of the same type.
------	---

Protective circuit DC voltage side (DC)

Maximum continuous operating voltage U_{CPV}	525 V DC
Open circuit voltage U_{OCSTC}	≤ 435 V DC
Short-circuit current rating I_{SCPV}	1000 A
Continuous operating current I_{CPV}	< 20 μ A
Standby power consumption P_C	≤ 25 mVA
Nominal discharge current (8/20) μ s	15 kA
Maximum discharge current I_{max} (8/20) μ s	40 kA
Impulse discharge current (10/350) μ s, charge	2.5 As
Impulse discharge current (10/350) μ s, specific energy	6.25 kJ/ Ω
Impulse discharge current (10/350) μ s, peak value I_{imp}	5 kA
Voltage protection level U_p	≤ 1.8 kV
Residual voltage U_{res}	≤ 1.8 kV (at I_n)
	≤ 1.5 kV (at 5 kA)
	≤ 1.7 kV (at 10 kA)
	≤ 1.9 kV (at 20 kA)
	≤ 2.2 kV (at 30 kA)
	≤ 2.4 kV (at 40 kA)
Response time t_A	≤ 25 ns
Insulation resistance R_{iso}	> 5 G Ω (at 500 V DC)

Indicator/remote signaling

Max. required back-up fuse	not required
----------------------------	--------------

UL specifications

SPD Type	4CA
----------	-----

Type 1/2 surge protection plug - VAL-MS-T1/T2 1000DCPV-UD-ST - 2801231

Technical data


UL specifications

Maximum continuous operating voltage MCOV (L+) - G	1050 V DC
Nominal voltage	875 V DC
Mode of protection	(L+) - G
Power distribution system	1
Measured limiting voltage MLV (L+) - G	1900 V
Nominal discharge current I _n (L+) - G	20 kA

Standards and Regulations

Standards/regulations	EN 50539-11 2013
-----------------------	------------------

Drawings

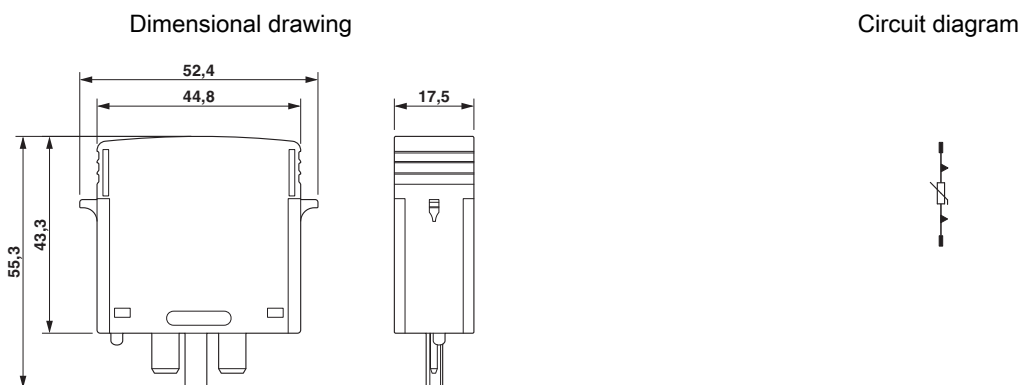

Approvals

Approvals

Approvals

KEMA-KEUR / EAC

Ex Approvals

Approval details

KEMA-KEUR		http://www.dekra-certification.com	2171492.01
-----------	--	---	------------

Type 1/2 surge protection plug - VAL-MS-T1/T2 1000DCPV-UD-ST - 2801231

Approvals

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>