


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00370	Connector, dc plug, 5.5x2.1xL25 mm, brass nickel plated	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00072	Overmold, PVC, black	1	black

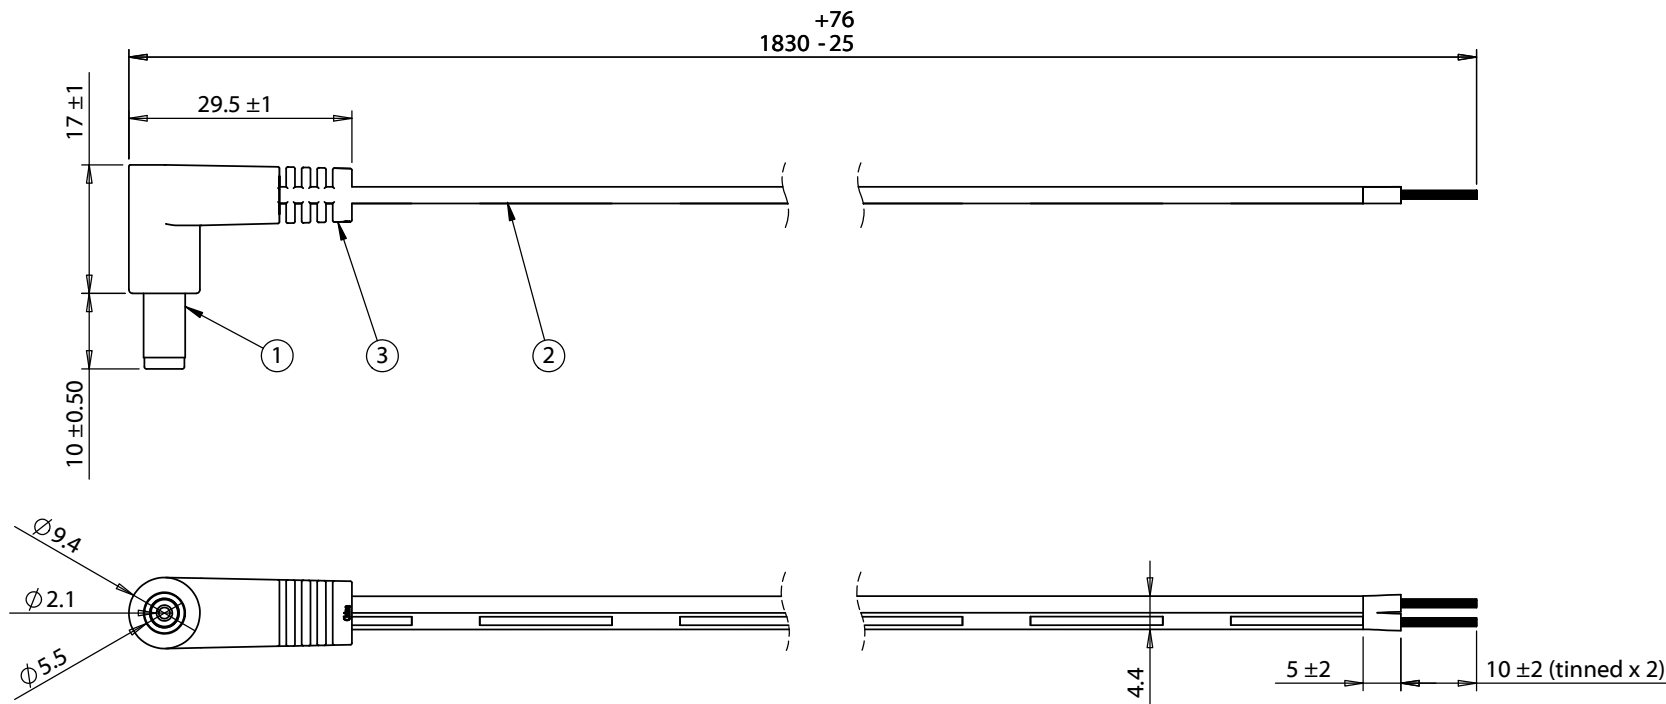

**Notes:**

Maximum operating temperature: 80°C

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram	
50-00370	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A1	8/31/2011	Updated description, connector, and wire information	Verified:	RoHS and REACH compliant					
A2	12/8/2011	Modified wire diameter	Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent					
A3	8/29/2013	Updated connector and overmold	Tolerances:	Description:					
A4	10/8/2013	Added overmold dimensions	X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 1830 mm, 5.5x2.1x10 mm, 90° 50-00370 dc plug to stripped tinned, 18 AWG, 30-00007 wire					
A5	10/12/2016	Corrected typo on operating temp			<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>053-0190R (CA-2191)</td> </tr> </table>	Size:	Part number:	A	053-0190R (CA-2191)
Size:	Part number:								
A	053-0190R (CA-2191)								