


CABLE PRINT
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1 + 24AWG/2C AWM STYLE 2725 80°C 30V VW-1

PIN ASSIGNMENT			
P1			P2
1	RED		1
2	WHITE		2
3	GREEN		3
4	BLACK		4
SHELL	DRAIN		SHELL

WSW order code	Cable length	PE BAG SIZE
AK669/2-18-black	1800±50mm	130*230*0.05mm
AK669/2-30-black	3000±50mm	130*230*0.05mm
AK669/2-50-black	5000±50mm	150*280*0.05mm

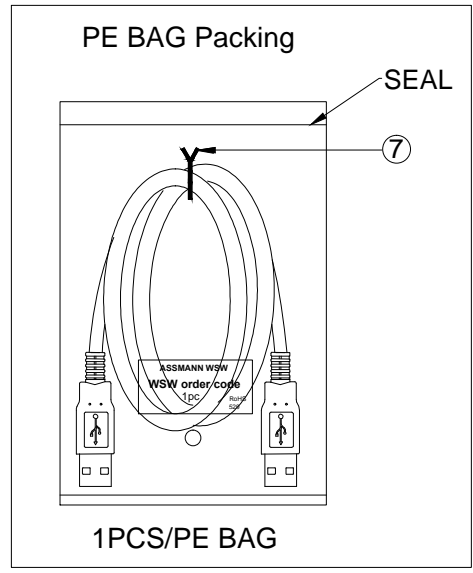

⑦	TIE	1	L=100mm
⑥	IN JACKET	3g	Clear LDPE
⑤	OUT JACKET	7g	black PVC-40P
④	OUT JACKET	6g	black PVC-40P
③	CABLE	1	black USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm
②	CONN	1	USB A FEMALE Nickel PIN G/F SHORT TYPE
①	CONN	1	USB A MALE Nickel PIN G/F 3PCS TYPE
No.	NAME	QTY	DESCRIPTION

- Electrical test:
- 100% short , open, miswire test
 - Conduct resistance: 2Ω max.
 - Insulation resistance: 5M ohm(min)
 - Dielectric test: DC 300V

RoHS compliant
 Unit: mm

Scale	FREE				Date	18.11.2014	Name	Joanna
TOLERANCE					Drawn	18.11.2014	Name	Joanna
DIM	TOL				Approved	18.11.2014	Name	Joanna
		①	Drawn	18.11.2014	Joanna			
Angle	TOL	Id.	Modification	Date	Name			

Customer-No.	
ASSMANN WSW-No. AK669/2-xx-black	
Drawing-No. ASS 7241 CA rev00	
Replace	Sheet