


IMPLANTATION C.1
PCB FOOTPRINT

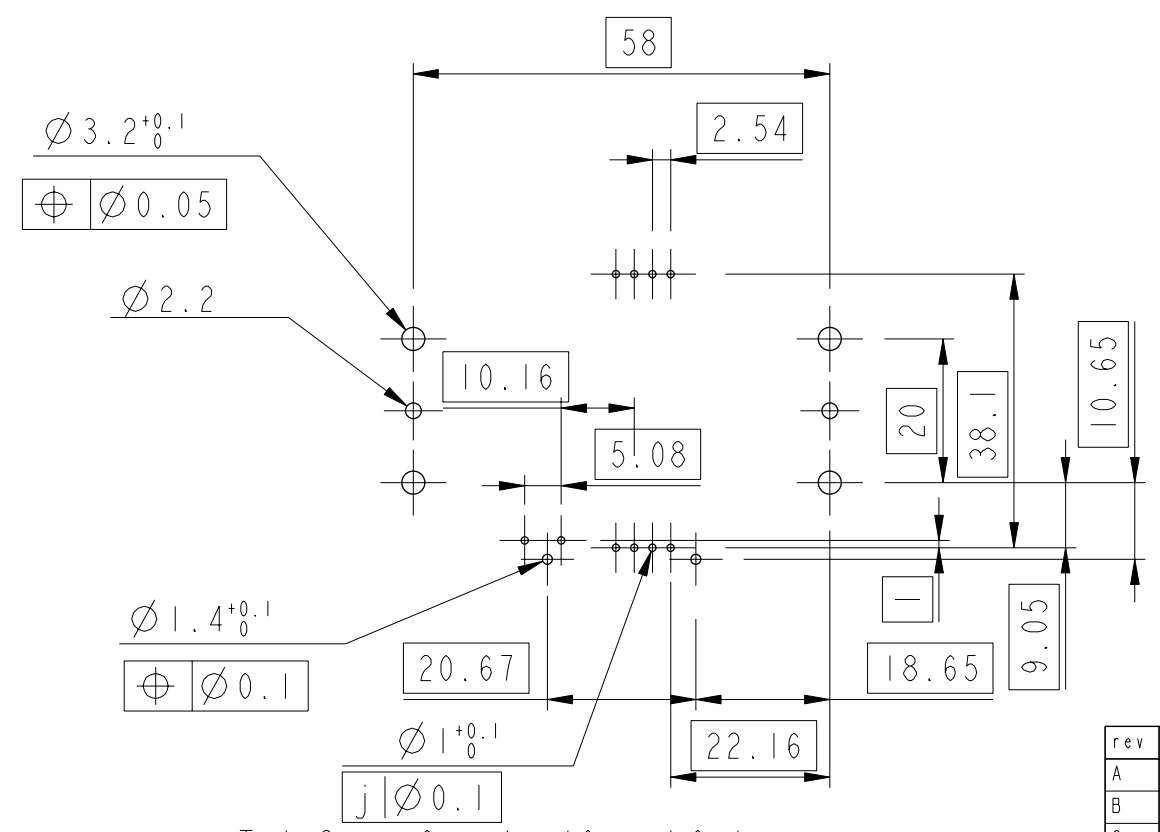

Tol Gen: 0mm to 10mm ±0.1mm
 10mm to 30mm ±0.15mm
 30mm to 60mm ±0.2mm
 60mm and above ±0.3mm

LEAD FREE VERSION:

"This product meets European Union Directives and other country regulations as described in GS-22-008"

The housing will withstand exposure to 260°C peak temperature for 3-5seconds in a wave solder application with a 1.6mm minimum thick circuit board.

Sn Matte plating on solder tail for Lead Free Versions


CATALOGUE NUMBER	LEAD FREE VERSION
7434L1625S13	7434L1625S13LF

www.fciconnect.com			surface - ✓ ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	S.Alosius	2002/02/04	ANGULAR 0° ±°	0.x	±
Eng	S.Alosius	2002/02/04		0.xx	±
Chr	S.S.CHERIAN	2008/06/14		0.xxx	±
Appr	S.S.CHERIAN	2008/06/14	Product family	SMARTCARD	Spec ref
FCi			title SMARTCARD ASSEMBLY		Rev.
			L16		VJW54613
			catalog no 7434L1625S13		CUSTOMER
					sheet 1 of 2

rev	ecn no	dr	date
A	F20307	SAI	2002/02/04
B	105-0181	NT	2005/09/27
C	108-0074	SSC	2008/06/14



Copyright FCI.

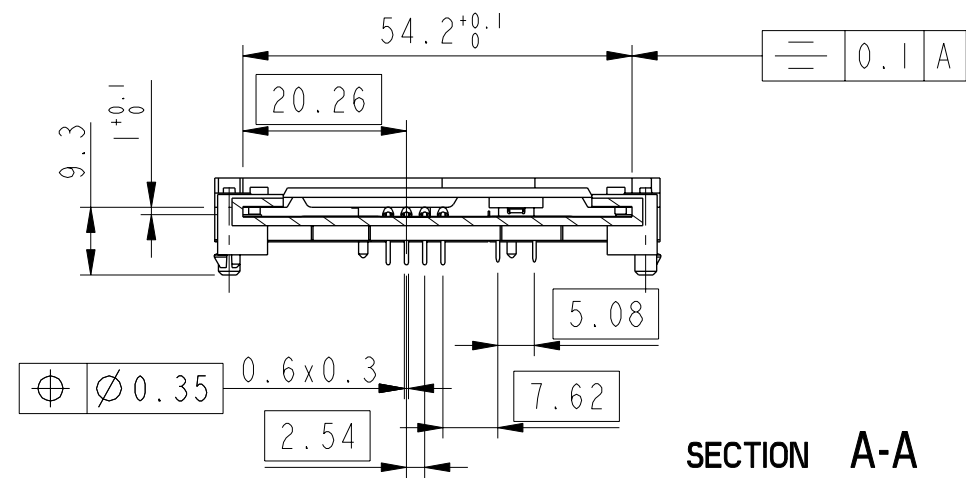

SECTION A-A



Copyright FCI.

www.fciconnect.com			surface - ✓ ISO 1302		tolerance std ISO 406 ISO 1101		projection mm			
			TOLERANCES UNLESS OTHERWISE SPECIFIED						↔	
Dr	S.Alosius	2002/02/04	ANGULAR	LINEAR	0.X	±	size A3	Scale 1:1		
Eng	S.Alosius	2002/02/04			0.XX	±		ECN 108-0074		
Chr	S.S.CHERIAN	2008/06/14			0.XXX	±		-		
Appr	S.S.CHERIAN	2008/06/14	Product family SMARCARDS				Spec ref -			
FCI		title SMARTCARD ASSEMBLY			dwg no VJW54613		Rev. C			
		catalog no 7434L1625S13			CUSTOMER		sheet 2 of 2			