
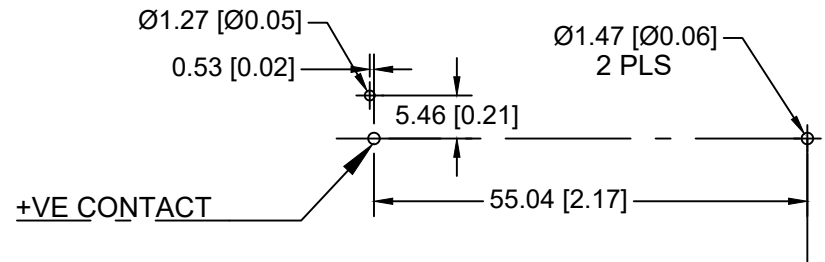
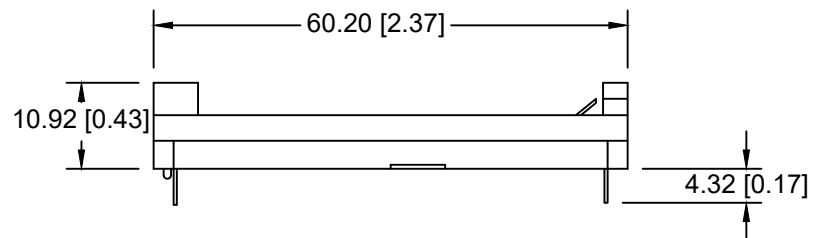



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

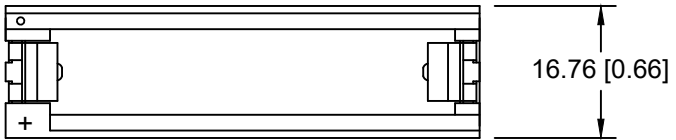

PCB LAYOUT

SPECIFICATION:  
HOUSING : BLACK POLYPROPYLENE  
FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
TEMPERATURE RANGE: -10°C to +100°C  
CONTACTS: NICKEL PLATED STAINLESS STEEL, TYPE 301, SPRING TEMPER  
CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000  
ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title ONE "AA" CELL SPRINGLESS HOLDER		
Angular ± 3°	Date 03/28/18	Drawing Number BA1AAPC	