

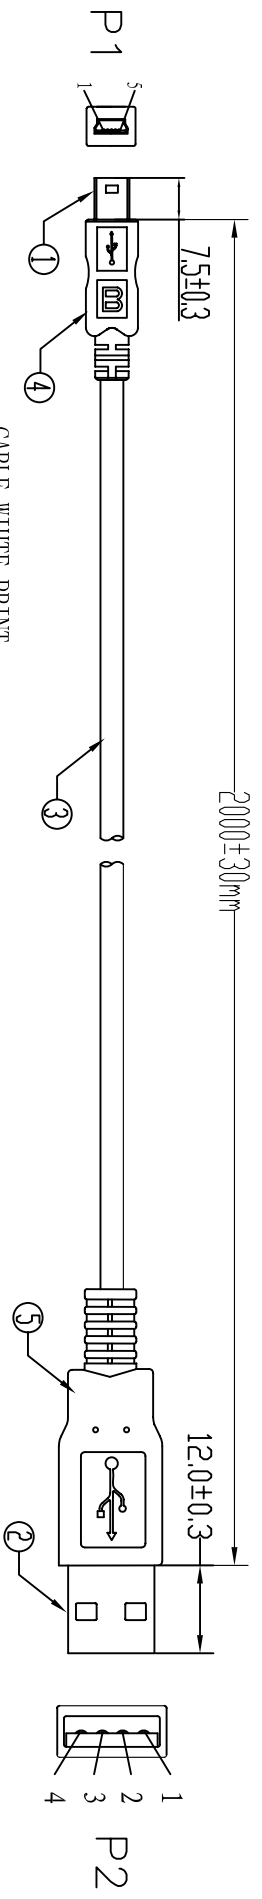


UNIT:mm

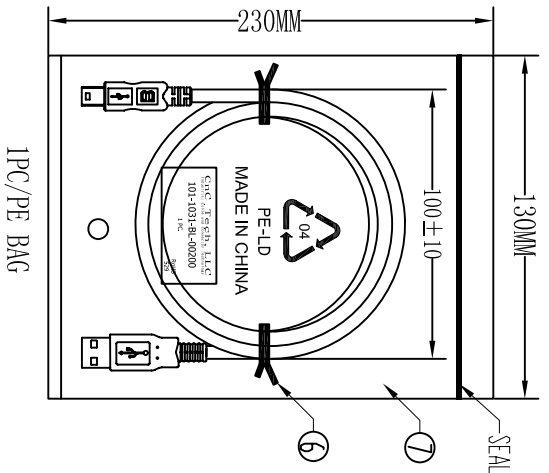

CABLE WHITE PRINT  
 USB CABLE E189529 **RU** AWG 27/25 VW-1 30V 80°C 28AWG/1PR AND 28AWG/2C

PIN ASSIGNMENT:

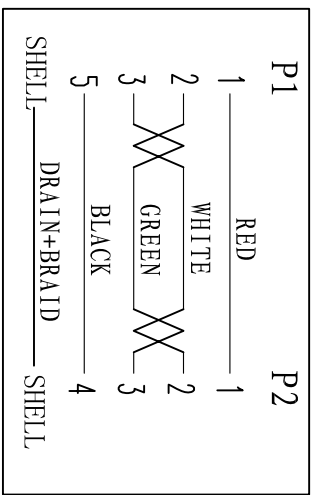

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

⑧	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "10PCS".
⑦	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PC".
⑥	TIE	1	BLACK L=100mm
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: WM-40)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: WM-88)
③	CABLE	1	BLACK USB1. 1 UL2725 28#/1P+28#/2C+A&B OD: 3.8mm L=2000±10
②	CONN	1set	USB A MALE SHELL: NICKEL PIN: G/F 4PCS TYPE INSULATOR COLOR: WHITE
①	CONN	1set	USB MINI 5P MALE SHELL: NICKEL PIN: G/F 3PCS INSULATOR COLOR: BLACK
NO.	NAME	Q'TY	SPECIFICATION

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1031-BL-00200
DECIDED		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	