


GAGE DIMENSIONS APPLY WHEN TOOL IS BOTTOMED BUT NOT UNDER PRESSURE.

FOR REPLACEMENT OF PARTS OTHER THAN LISTED, TOOL SHOULD BE RETURNED TO OUR FACTORY TO INSURE PROPER CERTI-CRIMP ADJUSTMENT.

**SUPERSEDED BY I.S. 2177**

QTY	UNIT	PART NUMBER	DESCRIPTION	REF
1	A	303542	STOP-LOCATOR	11
1	A	9-3007201	SCREW	10
1	A	301201	SPRING	9
1	A	302994	STOP-HOUSING	8
2	A	39207	PIN-ADJUSTMENT	7
2	A	21045-6	RING-RETAINING	6
1	A	300449	PIN-RETAINING	5
1	A	39364	SPRING	4
1	A	39366	COLLAR	3
2	A	300432	PIN-RETAINING	2
4	A	21045-3	RING-RETAINING	1

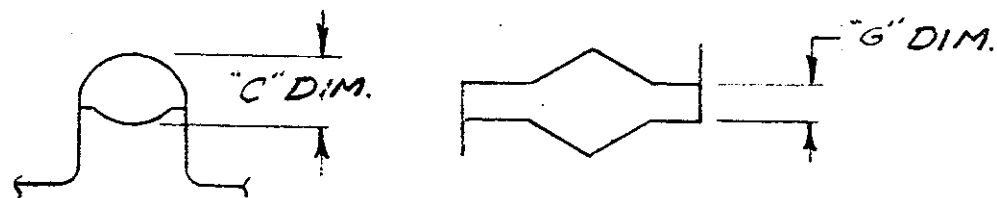

GAGE DIM.			
"C" DIM.		"G" DIM.	
GO	NO GO	GO	NO GO
.059	.065	.035	.055

REV	DESCRIPTION	DATE	BY	CHK
G	SUPERSEDED BY I.S. 2177	11/77	E.W.	
F	REVISED		F.E.	
E	REVISED		C.M.	
D	REVISED		C.M.	
C	REVISED		R.Y.	
B	REVISED		R.Y.	

46256	REQUIRED PER ASSEMBLY	QTY	UNIT	DESCRIPTION
	© 1960 AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND PATENT PENDING.			
	CHECKED BY: <i>C. J. ...</i> DATE: 4-29-62		MATERIAL ALL IN IN	
	APPROVED BY: <i>E. J. ...</i>		PRE INSULATED DIAMOND GRIP	
NAME: <b>HAND TOOL ASSEMBLY</b>		PART NUMBER: <b>46256</b>		

DIMENSIONS IN INCHES DO NOT SCALE PRINT