

PERFORMANCE CHARACTERISTICS


CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)  
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)  
OPERATING TEMPERATURE -55°C TO 125°C  
CONTACT RESISTANCE 20 MΩ MAX  
INSERTION FORCE :0.75 N MAX /CONT  
EXTRACTION FORCE: 0.15 N MIN /CONT  
INSULATION RESISTANCE :10<sup>4</sup> MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)  
THIS PRODUCT IS CSA APPROVED  
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT  
P.C.B.-HOLE

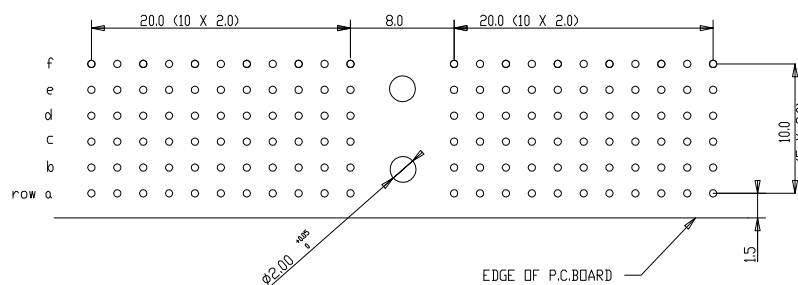

Material		Spec ref		tolerance	projection	MM
Mat code		Heat treat		±0.05	±0.10	±0.20
Plating/Finish						
rev	ecn no	dr	date	Dr	27 08 96	W.Paris
A	3505-0256	KN	14-9-01	Eng		
B	3505-0256	Guo JM	03/08/05	Chf		
C	3507-0362	Kason	05/09/07	Appr		
D	0500-0110	NZ	05/30/10			
-	-	-	-			
-	-	-	-			
05	BEC 9.2546	RN	11/06/10	Prv/E File	catalog no	

Product family	Model Name	ECN	REL Level	Scale
MILLIPACS	HMER01PA5104----			5.000
Model Revision				

Part No	Title	Proj	Spec ref	Rev
FCI	MPACS 5+2R RA RCP CONN TYPE A		BS,C,201444,018	D

This drawing is the property of FCI. It is to be used for manufacturing purposes only. No part of this drawing may be reproduced without the written permission of FCI. Copyright © 2011.