

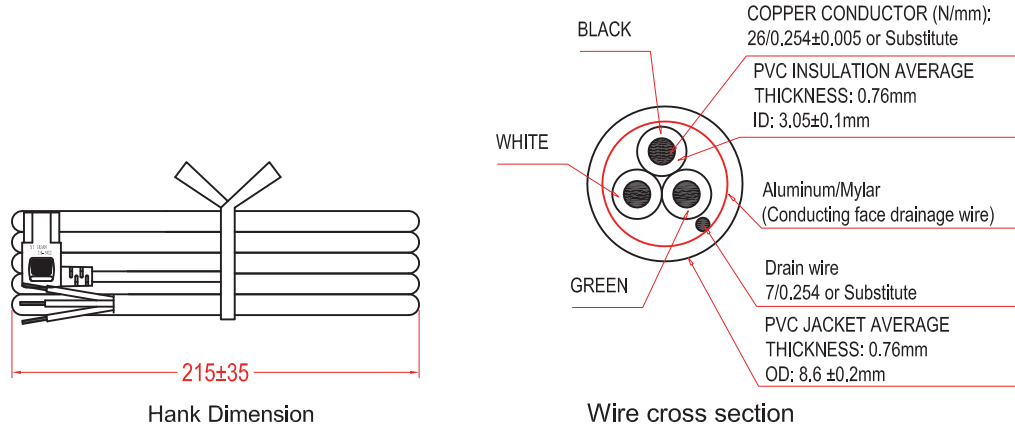


1			2			3			4			5			6		7	
PLUG COMPONENT			PLUG STRIP DIMENSION			SJT 16AWGx3C			END STRIP DIMENSION			TERMINAL COMPONENT						
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR	60°C Shielded Black			R.O.J	R.I.J	COLOR	DESCRIPTION	TYPE					
40P BLACK	PVC Compound	1	6 ⁺¹ ₋₀	15 ± 1	BLACK(L)	Length 3000±50			50.8±5.0	15.9±3.0	BLACK(L)	FULL TINNED						
True color	Assembly Body 111-001-005	1	6 ⁺¹ ₋₀	15 ± 1	WHITE(N)				50.8±5.0	15.9±3.0	WHITE(N)	FULL TINNED						
			6 ⁺¹ ₋₀	15 ± 1	GREEN(E)				50.8±5.0	15.9±3.0	GREEN(E)	FULL TINNED						

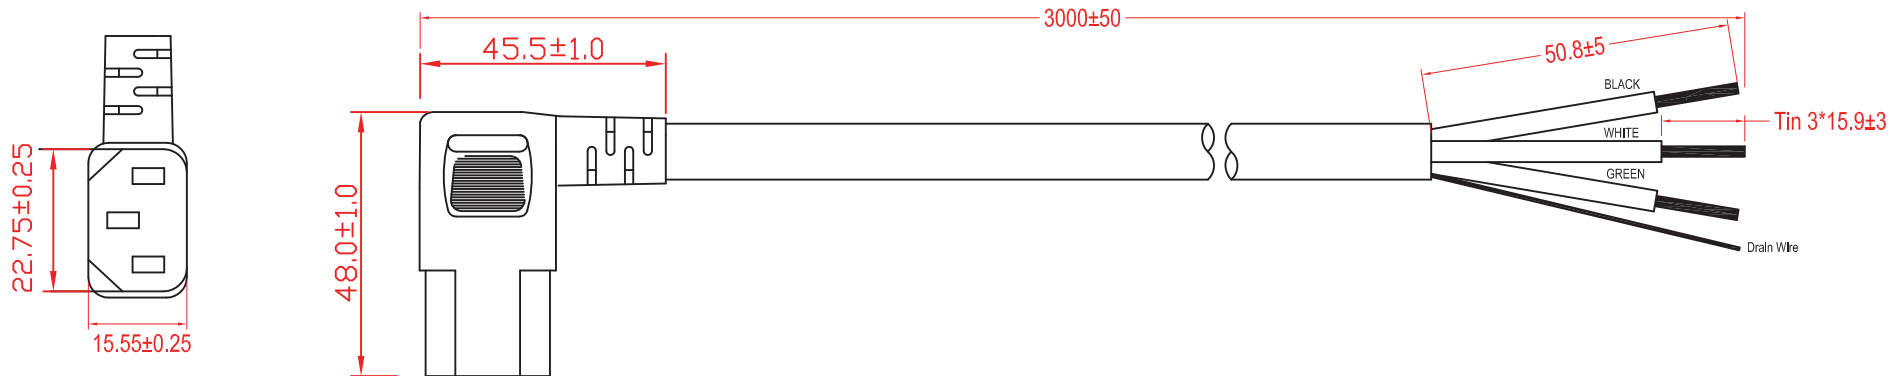

- Material:**
- SJT 3x16AWG(1.31MM²) vw-1 Shielded, 60° 300V
 - Jacket color: Black
 - E- Green; L- Black; N- White
 - All material must be RoHS compliant.
- Electrical:**
- 100% open & short testing
 - Insulation Resistance: 100MΩ min.
 - Voltage: 500V DC/1 minute

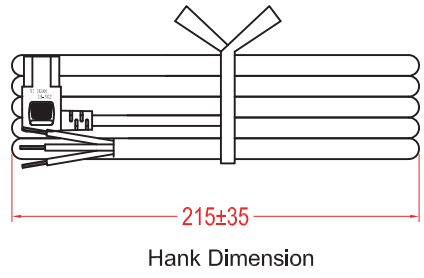

Hank Dimension

Wire cross section

Unit: mm



Scale	Free					Date	Name
TOLERANCE						Drawn	24.11.14 Wilson
X.	±0.3					Approved	24.11.14 Theis
X.X	±X						
X.XX	±X						
DIM	TOL					 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us	
X.°	±X°						
X.X°	±X°						
Angle	TOL	Id.	Modification	Date	Name		

Title		Power cord - L/A ⇔ Open End	
		SJT, 16AWG, Shielded, 60°, 3 Meters	
ASSMANN WSWW-No.		A-PC1503-030030-1	
Drawing-No.		rev00	
Replace	Sheet	1/1	

1			2			3			4			5			6		7	
---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	---	--