

SCHMATIC

SPECIFICATIONS

FUNCTION:  
2P2T ON-(ON)



RATING:  
ANSI/UL 1054 and CAN/CSA C22.2 No.55 (E194579):  
16A 125VAC [cURus]  
12A 250VAC [cURus]  
1HP 125/250VAC [cURus]

CONTACT RESISTANCE:  
Initial: 10mΩ Max.


TEMPERATURE:  
Operating: 0°C to 85°C [cURus]

ELECTRICAL LIFE:  
6,000 Cycles [cURus]

APPROVALS:  
**ROHS**  
COMPLIANT

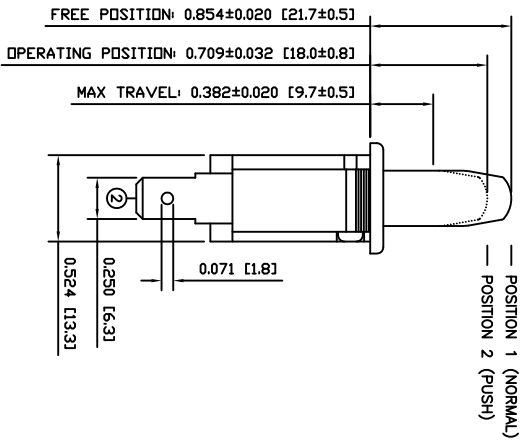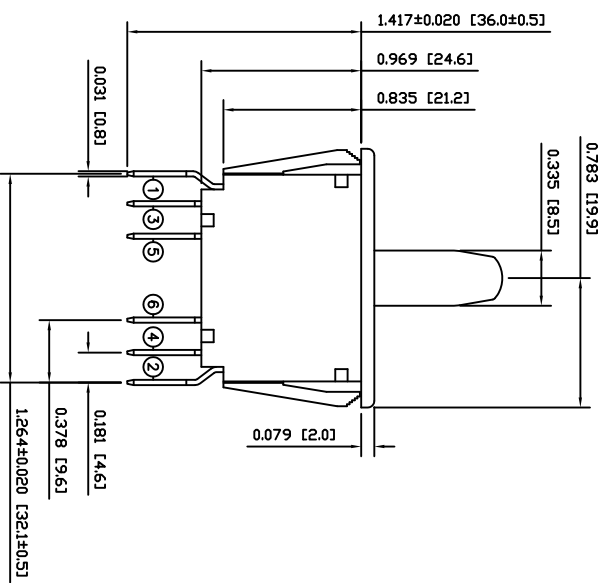

SUGGESTED PANEL CUTOUT



0.531 [13.5] [13.5mm]

| ACTUATOR BODY COLORS MATERIALS SPECIFICATIONS REFERENCE | REV.     | DATE | BY |
|---|----------|------|----|
| B   | 10/07/28 | CAB  |    |
| A   | 09/10/28 | CAB  |    |
| C   | 10/07/19 | CAB  |    |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

| INITIAL RELEASE DESCRIPTION | REV.     | DATE | BY |
|-----------------------------|----------|------|----|
| 18277                       | 10/08/18 | CAB  |    |

| DIMENSIONS         | INCHES [MILLIMETERS] |
|--------------------|----------------------|
| GENERAL TOLERANCES | ±0.008 [±0.2] / ±1'  |
| SCALE              | DRAWING NOT TO SCALE |

**E-SWITCH**

PP2-4H7-2A2

**LAMB INDUSTRIES**

DATE: SEPTEMBER 16, 2010

REVISION: A