

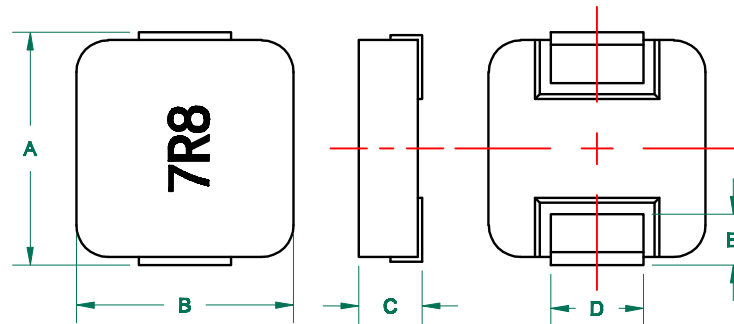


MGV12057R8M-10


PHYSICAL DIMENSIONS:

A	13.50	±	0.50
B	12.60	±	0.30
C	5.00	±	0.30
D	3.60	±	0.50
E	2.30	±	0.50

LAND PATTERNS FOR REFLOW SOLDERING

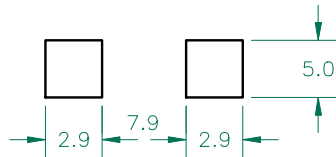

UNCONTROLLED DOCUMENT

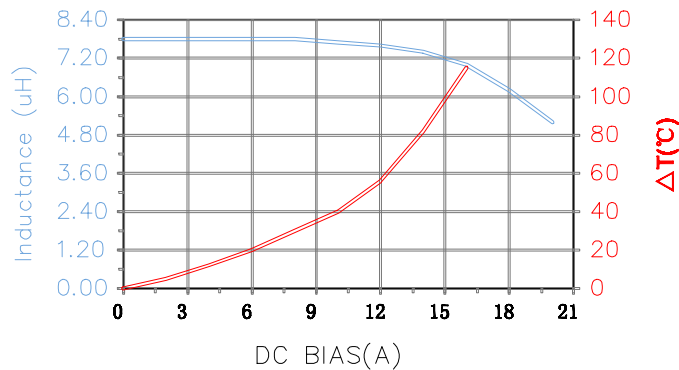

	Min	Nom	Max
INDUCTANCE (uH)			
L @ 100KHz/0.25V ± 20%	6.24	7.80	9.36
DCR (mΩ)			20.50

Saturation Current ³ Isat (A)	18.00
Temperature Rise Current ⁴ Irms (A)	10.00

NOTES: UNLESS OTHERWISE SPECIFIED

- COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
- OPERATION TEMPERATURE RANGE:
-40°C~+125°C (INCLUDING SELF-HEATING).
- DEFINITION OF SATURATION CURRENT (ISAT): DC CURRENT AT WHICH THE INDUCTANCE DROPS ≤25% FROM ITS VALUE WITHOUT CURRENT.
- DEFINITION OF TEMPERATURE RISE CURRENT (IRMS): DC CURRENT THAT CAUSES THE TEMPERATURE RISE (ΔT ≤40°C) FROM 25°C AMBIENT.

DIMENSIONS ARE IN mm.				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird		
PROJECT/PART NUMBER:	MGV12057R8M-10			REV	B	PART TYPE:	POWER INDUCTOR	
DATE:	10/10/12	QIU	DATE:	10/10/12	SCALE:	NTS	DRAWN BY:	QIU
REV	A	DESCRIPTION	DATE	10/10/12	CAD #		TOOL #	-
REV	B	CHANGE TOLERANCE OF D FROM 0.30	DATE	03/26/13	QIU			
							SHEET:	1 of 1