



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPROVED
AF	50				G	REVISED SLOT PER AF-7315	3/26/91	MSF/NN

IDENTIFICATION NUMBER 24 FOR MAGNET WIRE RANGE.



FITS .187 SERIES FASTON RECEPTACLE

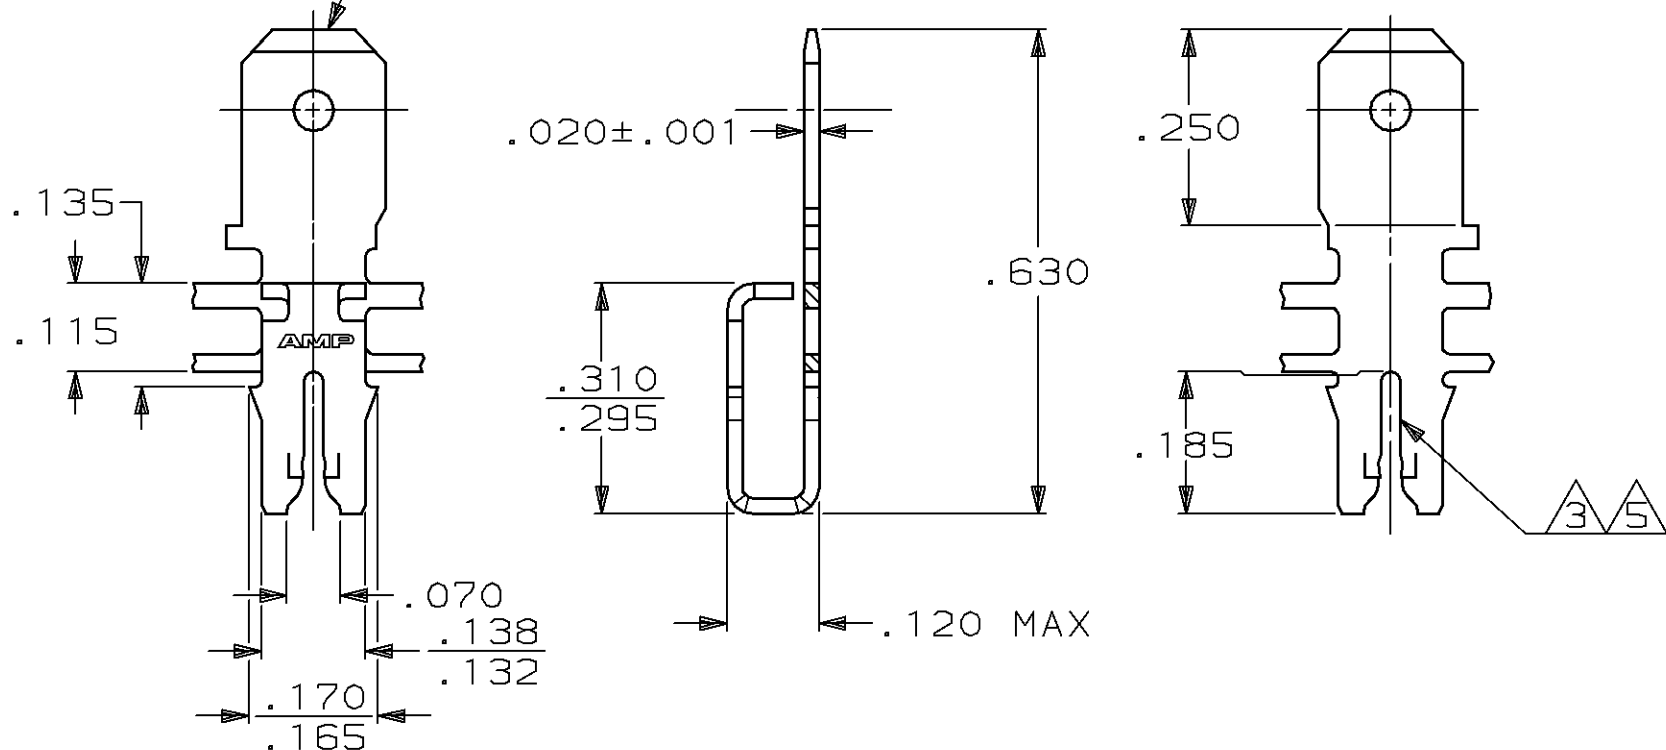

- ① MAG-MATE CAVITY SPECIFICATION.
- ② CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON .220 CENTERS.
- ③ SLOT ACCEPTS #19-#17 COPPER MAGNET WIRE.
- ④ AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- ⑤ #18-#16.5 AWG ALUMINUM MAGNET WIRE WITH CAVITY ANVIL HEIGHT OF .090±.005.

63273-1

PART NO

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DEC ± - 3 PL DEC ± .010 ANGLES ± 1°	DR 11/7/88 MICHAEL S. FEHER	AMP INCORPORATED Harrisburg, Pa. 17105
	CHK 11/9/88 JEFF R. RUTH	
MATERIAL #4M HARD BRASS	APPD 11/9/88 NELSON E. NEFF	NAME TAB, 187 FASTON, MAG-MATE™
FINISH .000080 MIN TIN	APPD 11/10/88 CHARLIE G. ATHERTON	SIZE <b>B</b>
	PRODUCT SPEC -	FSCM NO 00779
	APPLICATION SPEC 114-2046 ①	DRAWING NO 63273
	WEIGHT -	SCALE 4:1
		SHEET 1 OF 1