



# O.C.H. Micro Circular Connectors

Designed . . . Authorized . . . US Army Nett Warrior Soldier Vest Applications

## SMALL, LIGHT, TOUGH

- Lightweight aluminum shell and thermoplastic inserts
- Very small footprint
- Ruggedized for battlefield conditions

## COMPATIBLE

- Intermateable with Nett Warrior products

## HIGH PERFORMANCE

- Push/pull quick disconnect coupling meets breakaway force of 13 ±3 lbf
- Ruggedized small circular connector meets mechanical and environmental performance requirements of MIL-STD-810G

## APPLICATIONS

- Soldier Vest Cables
- Batteries
- Antennas
- Communication/Power Hubs
- Radios
- Military Vehicles

## O.C.H. Micro Circular Connectors

### Authorized for Use in Nett Warrior Soldier Vests and Peripheral Devices

The Nett Warrior program was developed by the US Army to provide ground soldiers with instant situational awareness and communications capability by directly connecting them to the army's tactical network. Like all communications devices, smaller and lighter is the order of the day. Every ounce saved is extra weight taken off the backs of our soldiers.

### TE Connectivity (TE) is now an authorized source for Nett Warrior

soldier vest and vest peripheral devices. This now gives the industry another authorized source for Nett Warrior connectors.

Our ruggedized O.C.H. micro circular connectors have passed the rigorous performance requirements set by the US Army, including the mechanical and performance requirements of **MIL-STD-810G**. These circular connectors feature a push-pull coupling and quick disconnect per the US Army's Nett Warrior specification. The connectors can be ordered against National Stocking Numbers 5935-016595575 and 5935-016594090.


### TE Components . . . TE Technology . . . TE Know-how . . .

AMP | AGASTAT | CII | HARTMAN | KILOVAC | MICRODOT | NANONICS | POLAMCO | Raychem | Rochester | DEUTSCH  
SEACON Phoenix | Phoenix Optix | AFP | SEACON

Empower Engineers to Solve Problems, Moving the World Forward.

# O.C.H. Micro Circular Connectors

Designed . . . Authorized . . . US Army Nett Warrior Soldier Vest Applications

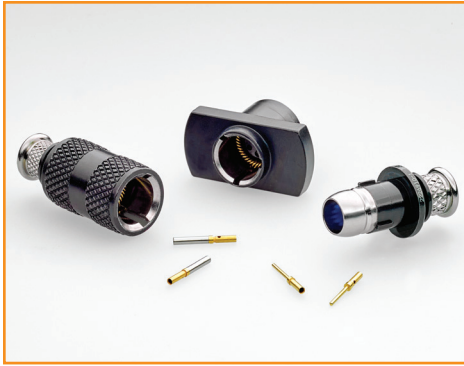

## Specifications

- **Shell:** Aluminum alloy, selectively plated zinc-nickel over electroless nickel overall
- **Inserts:** Thermoplastic
- **Contacts:** Copper alloy, plated gold over nickel

## ELECTRICAL

- **Insulation Resistance:** 100 M $\Omega$  min. at 500 VDC
- **Contact Current Rating:** 5 A (-18°C to +71°C, crimped to 22 AWG wire)

## MECHANICAL

- **Shock:** MIL-STD-810G, Method 516.6, Procedure IV
- **Vibration:** MIL-STD-810G, Method 514.7, Procedure I, Method 514.6, Category 5, Procedure II

## DOCUMENTATION

- **Product Specification:** 108-32114 and 108-32114-1
- **Qualification Test Reports:** 501-134052 and 501-134052-1

TE Part No.	Part Type	Contact Type	No. of Positions	National Stocking Number
2226910-1	Connector Plug - Cable Applied	Pin (Crimp)	6	5935-016595575
2226920-1	Connector Receptacle - Cable Applied	Socket (Crimp)	6	5935-016594090
2828420-1	Connector Receptacle - Battery (PC Tail)	Socket (Solder Tail)	6	N/A
2828420-2	Connector Receptacle - Battery (PC Tail)	Socket (Solder Tail)	7	N/A
2226913-1	Crimp Contact - Signal	Pin (Crimp)	N/A	N/A
2226913-2	Crimp Contact - Power	Pin (Crimp)	N/A	N/A
2226923-1	Crimp Contact	Socket	N/A	N/A

te.com/O.C.H.

© 2017 TE Connectivity Corporation. All Rights Reserved.

1-1773920-2 09/17

AMP, AGASTAT, CII, DEUTSCH, HARTMAN, KILOVAC, MICRODOT, NANONICS, O.C.H., POLAMCO, Raychem, SEACON, TE, TE Connectivity and the TE connectivity (logo) are trademarks of the TE Connectivity Corporation.

Other products, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information herein, nothing herein constitutes any guarantee that such information is error-free, or any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. The TE entity issuing this publication reserves the right to make any adjustments to the information contained herein at any time without notice. All implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose are expressly disclaimed. The dimensions herein are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice.

Consult TE for the latest dimensions and design specifications.

North America +1 800 522 6752 • Asia Pacific +86 0 400 820 6015 • France +33 1 34 20 86 86 • Germany +49 6251 133 1999 • United Kingdom +44 800 267 666  
Visit te.com for additional country contacts.