

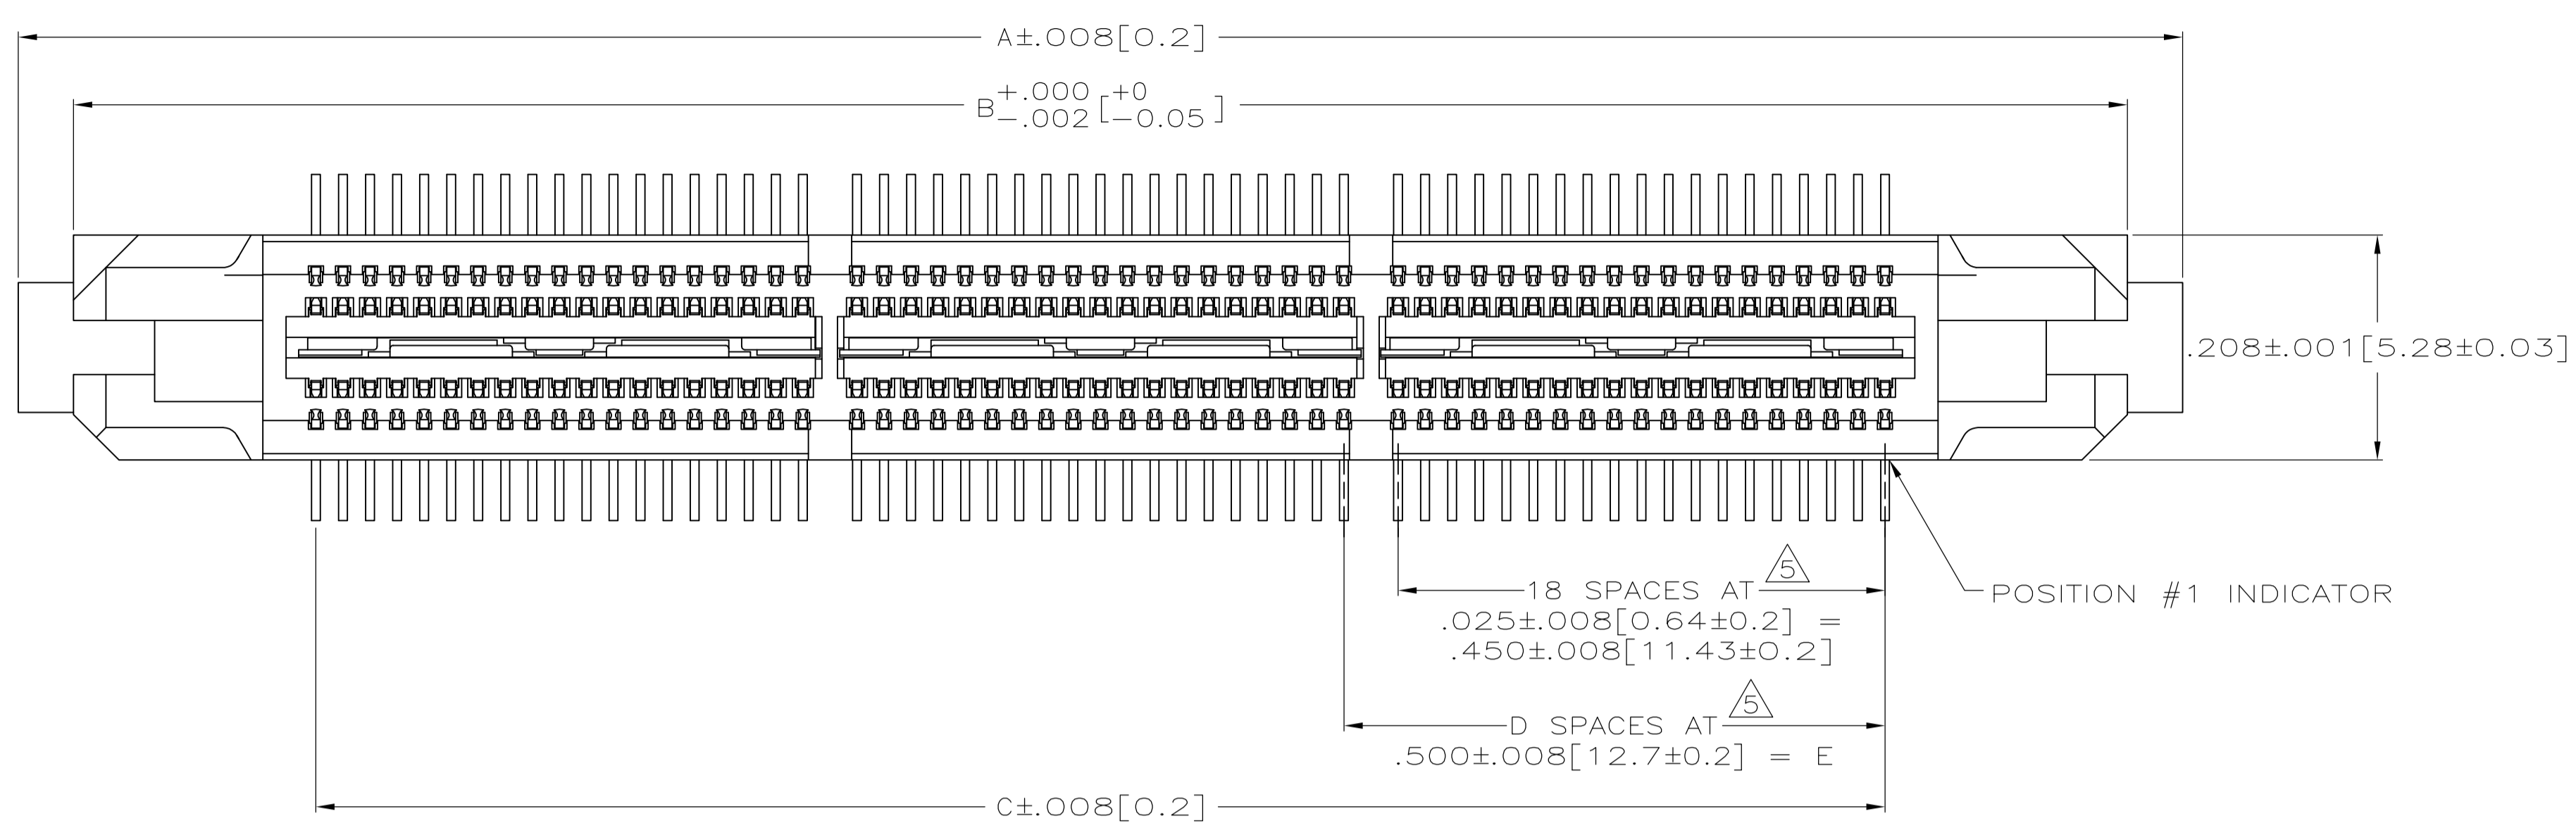
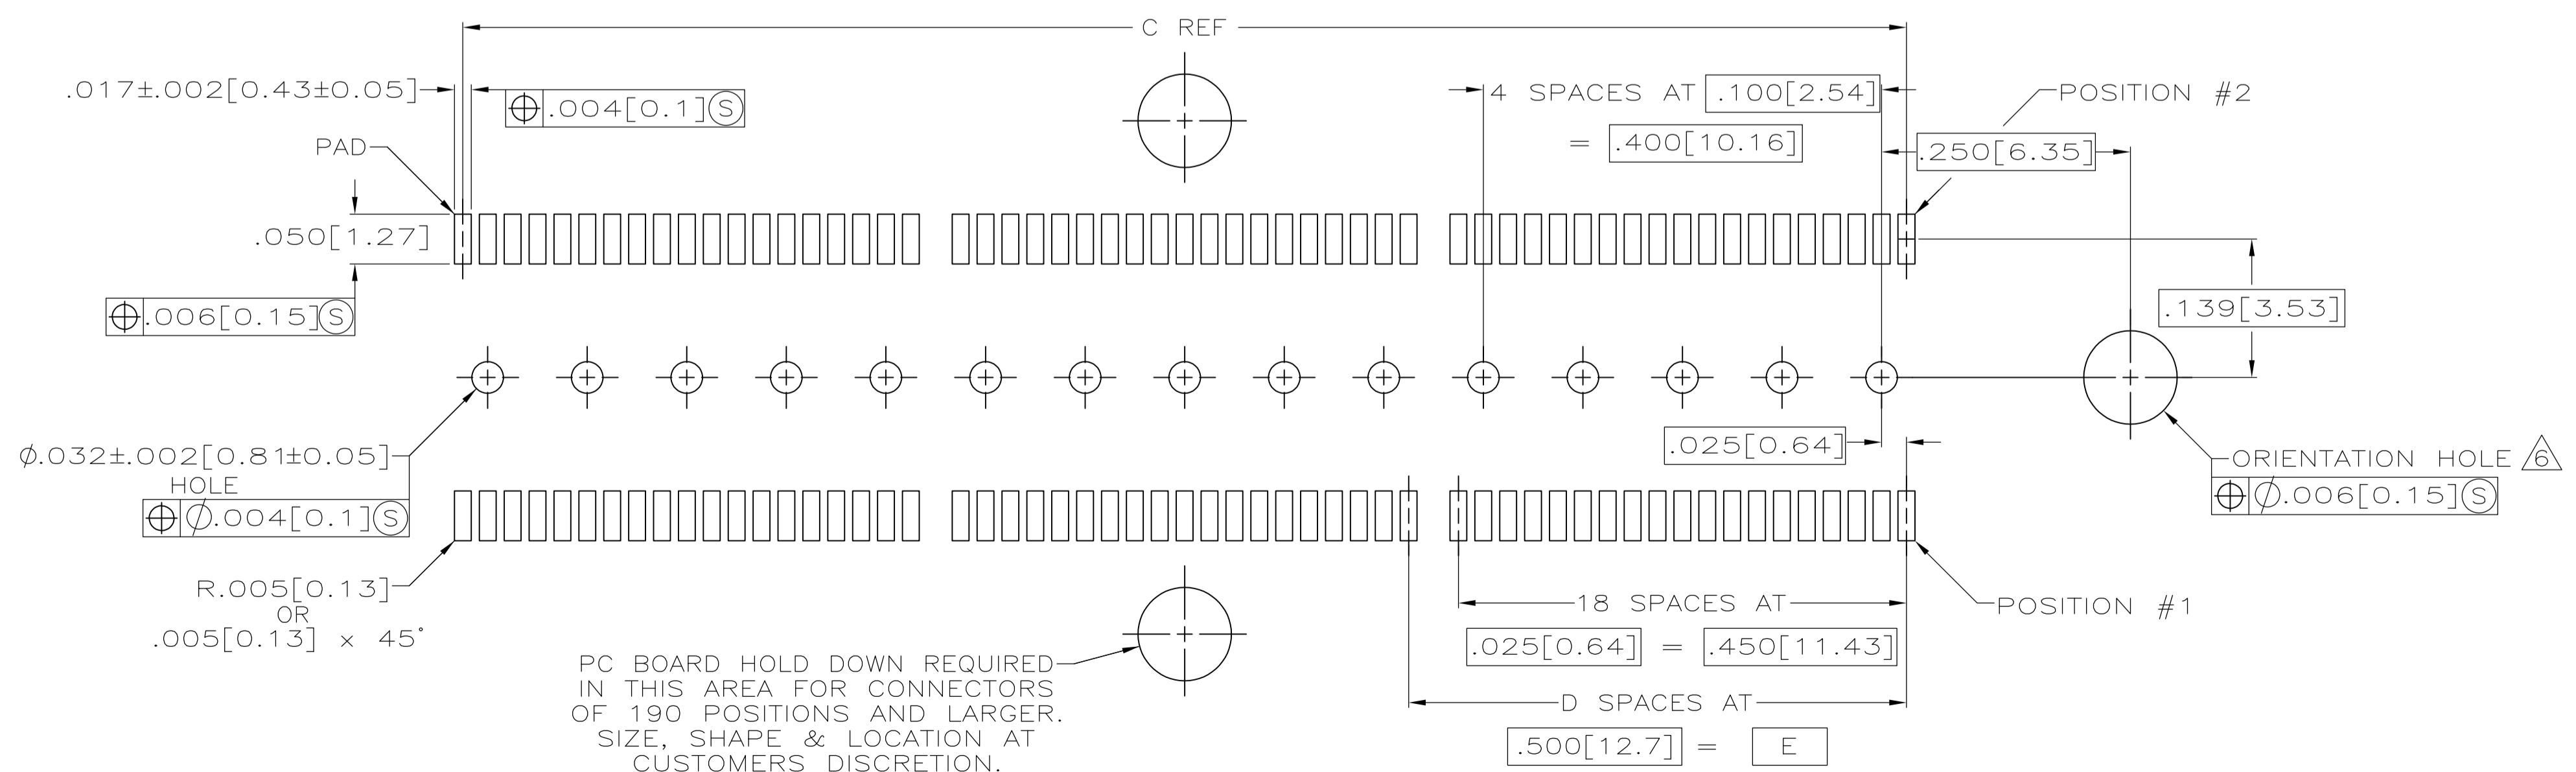


REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APVD
B1		REVISED PER ECO-15-006874	15NOV2015	AP	MH

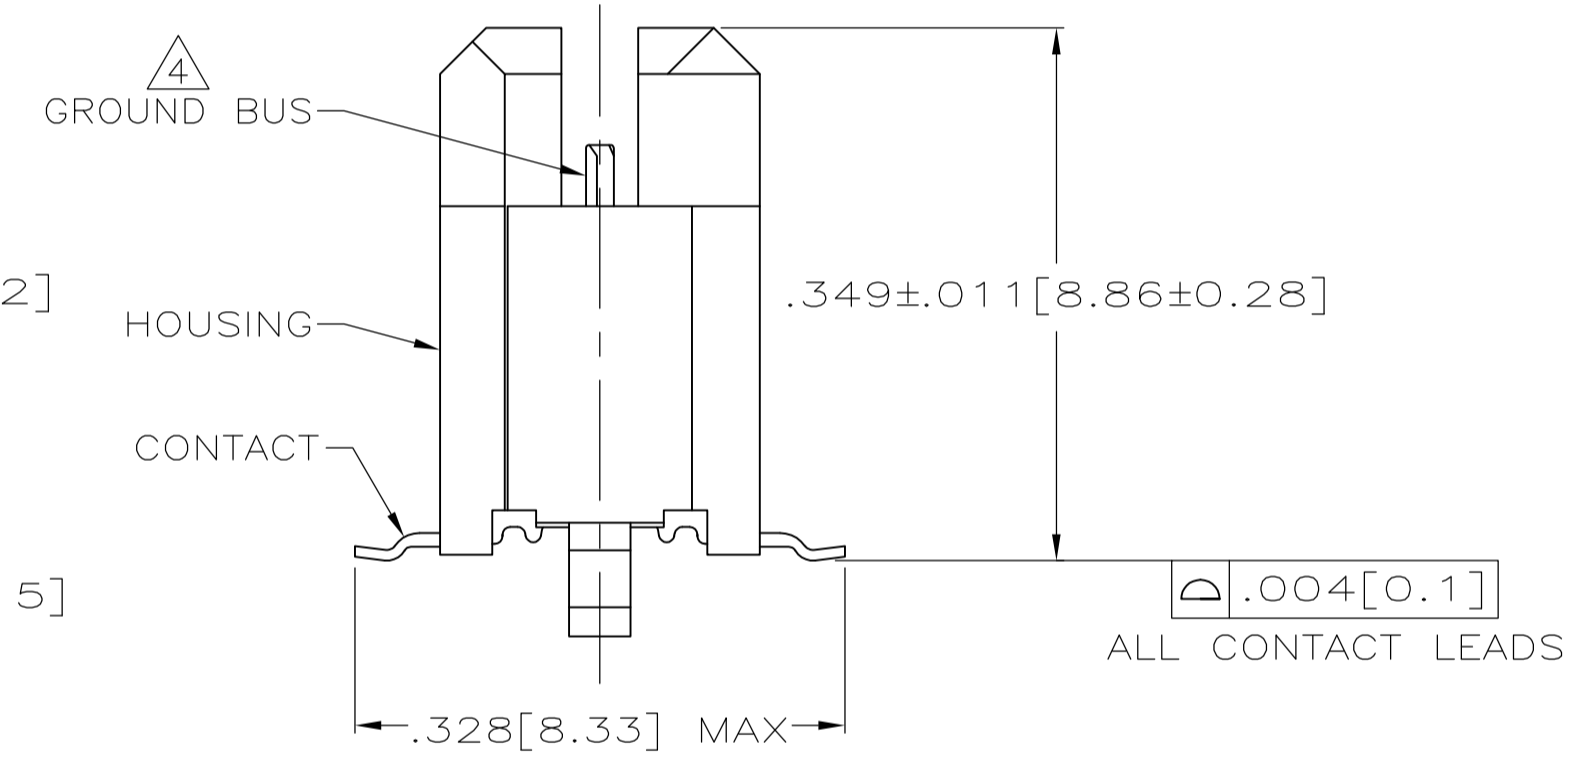

- ① HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK. CONTACTS: HIGH RELIABILITY COPPER ALLOY. GROUND BUSES: BRASS.
- ② CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 1 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED MATTE TIN.
- ③ DATE CODE MARKED IN AREA INDICATED ON SAME SIDE AS POSITION #1.
- ④ ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- ⑤ TOLERANCE NON-ACCUMULATIVE.
- ⑥ FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE $\phi .094 \pm .002 [2.39 \pm 0.05]$. FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE $\phi .079 \pm .001 [2.00 \pm 0.03]$.

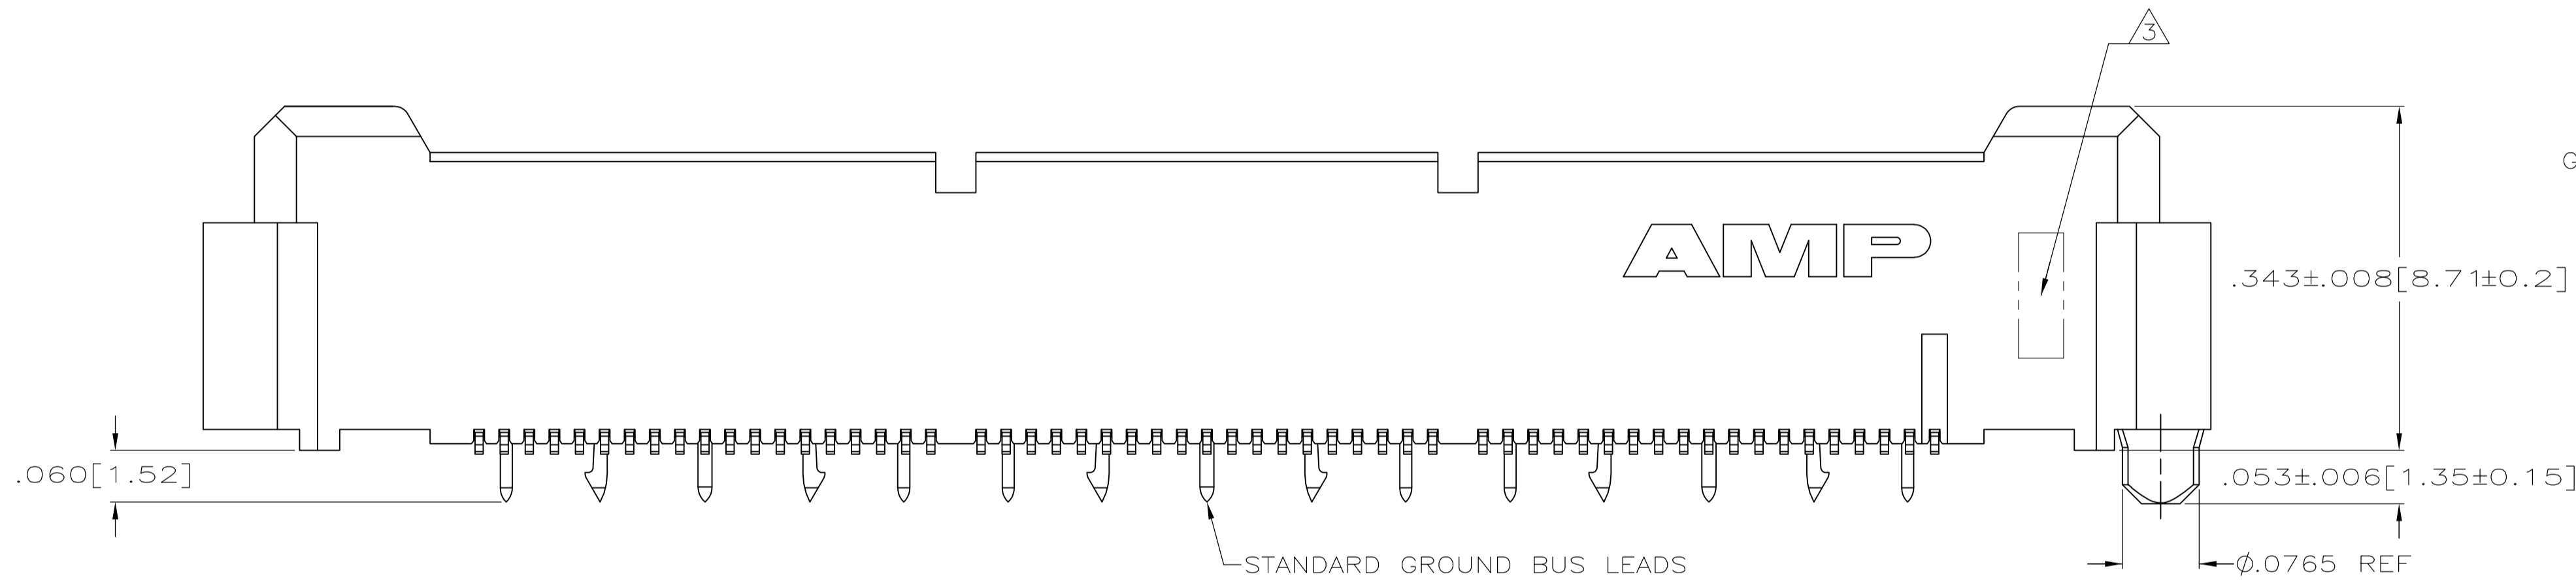

PC BOARD HOLD DOWN REQUIRED IN THIS AREA FOR CONNECTORS OF 190 POSITIONS AND LARGER. SIZE, SHAPE & LOCATION AT CUSTOMERS DISCRETION.

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

POS	PLC	INCHES	MILLIMETERS	POS	PLC	INCHES	MILLIMETERS
266	5767139-7	3.000[76.2]	6	3.450[87.63]	3.898[99]	4.000[101.6]	266
228	5767139-6	2.500[63.5]	5	2.950[74.93]	3.398[86.31]	3.500[88.9]	228
190	5767139-5	2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190
152	5767139-4	1.500[38.1]	3	1.950[49.53]	2.398[60.91]	2.500[63.5]	152
114	5767139-3	1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114
76	5767139-2	.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76
38	5767139-1	.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38
		E	D	C	B	A	NO OF POS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .005(0.13)	4 PLC ± -	ANGLES ± -
--------------------	--	-----------	-----------	-----------	--------------------	-----------	------------

MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			A1	00779	5767139	

CUSTOMER DRAWING SCALE 8:1 SHEET 1 OF 1 REV B1