


PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

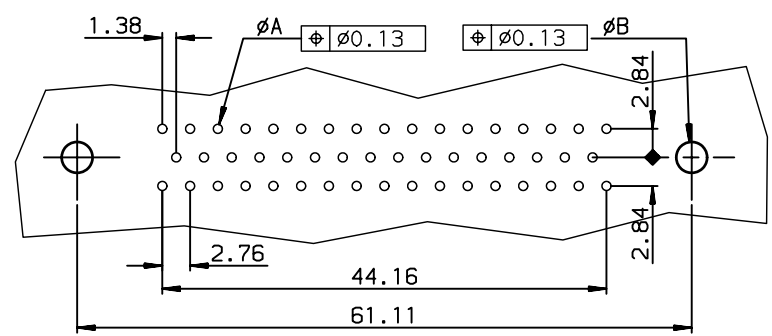

TIN LEAD PART NUMBER

D50S90C4PA00	D50S90C6PA00
Gold flash	0,76 μ gold

LEAD FREE PART NUMBER

D50S90C4PA00LF	D50S90C6PA00LF
Gold flash	0,76 μ gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
ANGULAR	LINEAR	0.X	±0.1	size A3
0.XX' ±2'		0.XX	±0.1	Scale 2
		0.XXX	±0.1	ECN LS06-0140
Product family D-SUB				Spec ref -
			title FEMALE CONNECTOR DELTA D with straight press fit contact	
catalog no -			dwg no C01-8646-0431	
			Rev. E	

rev	ecn no	dr	date
C	LS06-0011	MPE	2006/01/11
D	LS06-0097	LGO	2006/07/29
E	LS06-0140	LGO	2006/11/21
-	-	-	-
-	-	-	-
-	-	-	-

Copyright FCJ.