
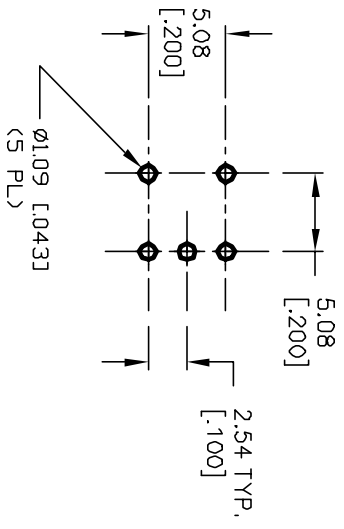





CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS: 1	PDS: 2	PDS: 3
DN	OFF	DN
2-3	OPEN	2-1

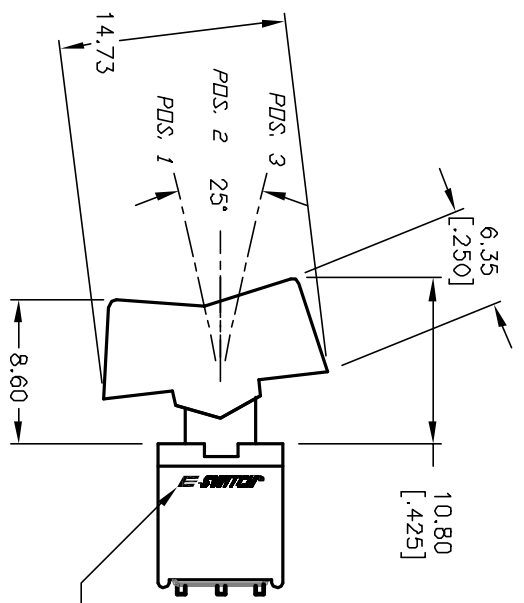

RECOMMENDED P.C.B. LAYOUT

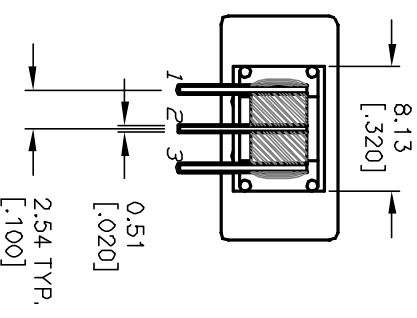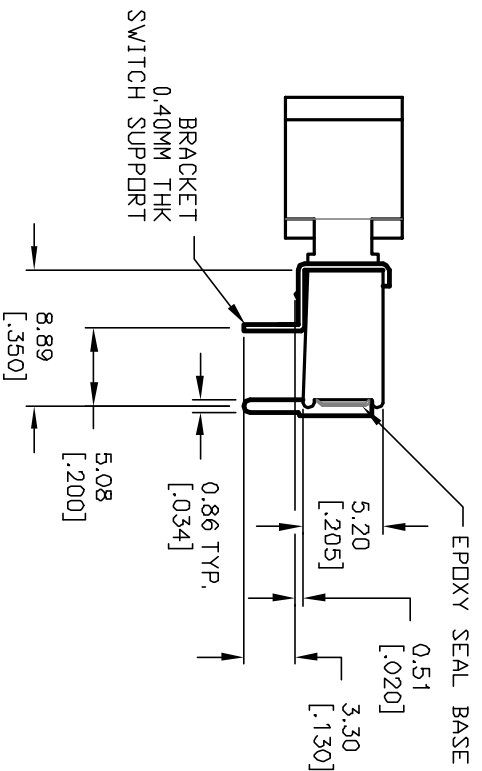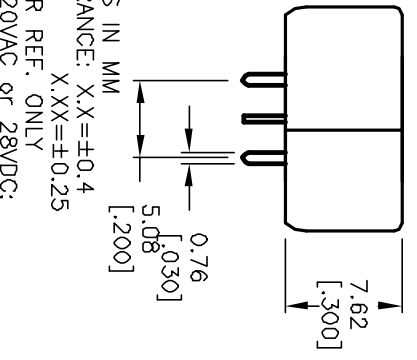

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120VAC or 28VDC;
1A @250VAC.
5. FIXED TERMINAL/MOVING CONTACT MATERIAL:
COPPER ALLOY w/Silver plate.
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP, -30°C to +85°C
10. ▲ DESIGNATE MAJOR FEATURE
11. ACTUATOR: NYLON, BLACK STD.

E-SWITCH®

B	12664	REVISED NOTE 4	CJB
A	12401	RELEASED	CJB
REV.	ECN No.	DESCRIPTION	DATE
			CHKD

TITLE	SCALE	DATE	DR	DWG	REV
4004 WMSP-3 R1 BLK M6 QF	2:1	4/12/01	CJB	T403010	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED