


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

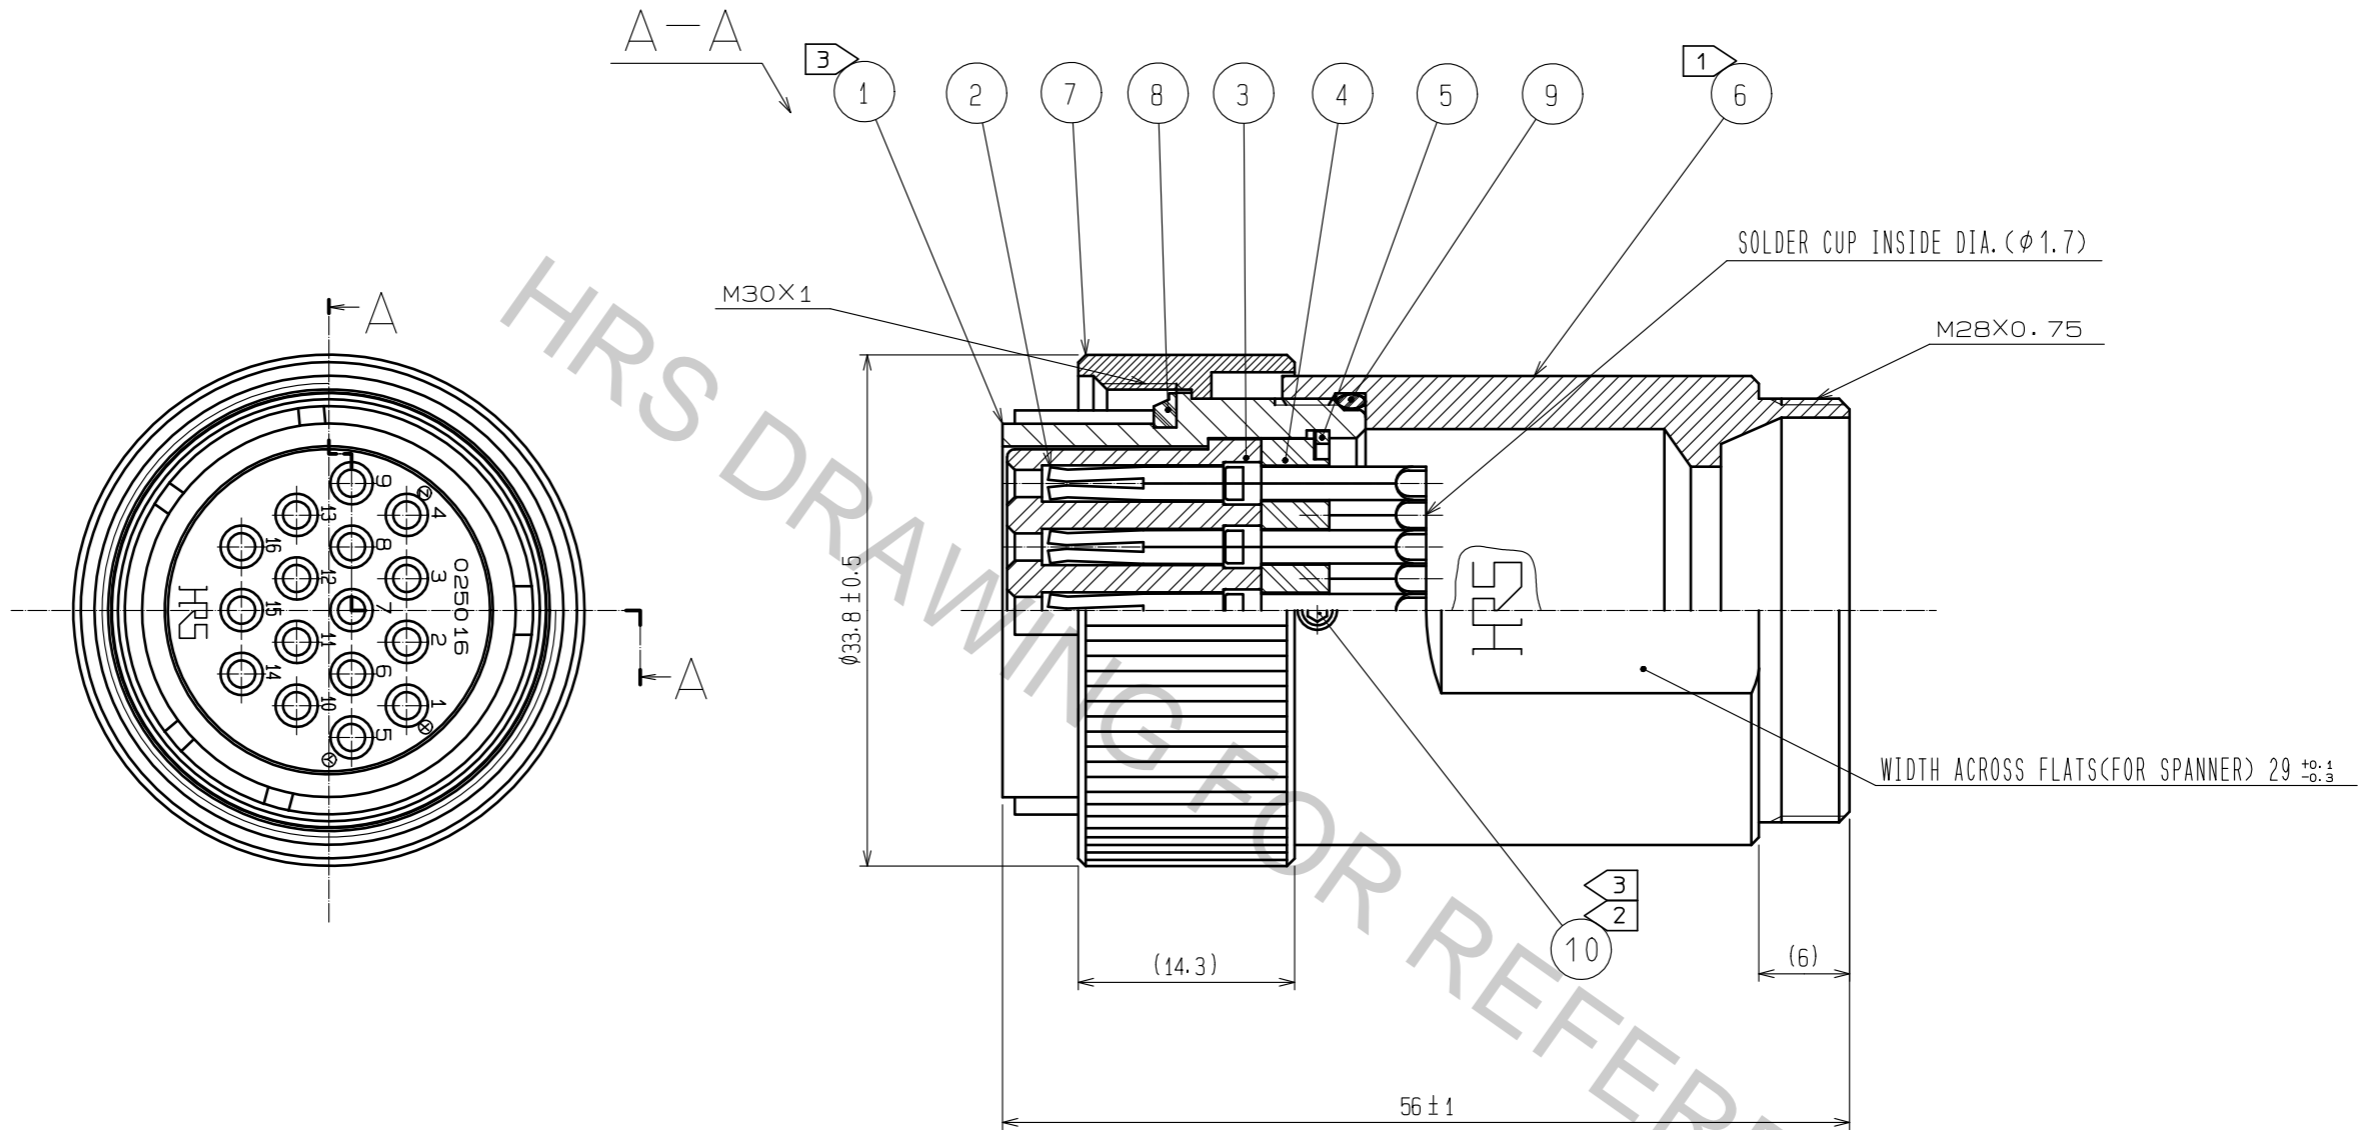

- NOTES
- ① THE RECOMMENDED CLAMP TORQUE REF. NO. ⑥ : 5 TO 5.5 N · m.
 - ② ACROSS FLATS OF HEAGON SOCKET OF REF. NO. ⑩ : 1.27
THE RECOMMENDED CLAMP TORQUE REF. NO. ⑩ : 0.2 TO 0.25 N · m.
 - ③ LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
REF. NO. ① AND NO. ⑥ FROM LOOSENING.
 - 4 POSITIONAL RELATIONSHIP IN ROTATIONAL DIRECTION BETWEEN REF. NO. ① AND ⑥ SHOWS AN EXAMPLE.
 - 5 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR25WCC-**,
** DESIGNATE DIAMETER OF APPLICABLE.
 - 6 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER.
DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	
4	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	9	ACRYLONITRILE BUTADIENE RUBBER	(GRAY)
3	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	8	ACRYLONITRILE BUTADIENE RUBBER	(GRAY)
2	COPPER ALLOY	SILVER PLATING 2 μm min.	7	BRASS	BLACK CHROME PLATING
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : HY. KOBAYASHI			18.02.26	DRAWING NO. EDC-110575-31-00		
CHECKED : HY. KOBAYASHI			18.02.26	PART NO. JR25WP-16S(31)		
DESIGNED : TH. KAMEYA			18.02.23	CODE NO. CL114-2021-2-31		
DRAWN : MK. INOUE			18.02.23			