

## SUMMARY

### # Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	00
Termination type	Male crimp
IP rating	50
Cable Ø	0.00 - 3.00 mm
Matching parts	
Status	<b>obsolete</b>
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FVS*: Straight plug with cable crimping, coaxial, threaded coupling
Keying	Circular (can rotate)
Housing Material	Brass (nickel plated) shell, collet nut, latch sleeve and mid pieces
Cable Fixing	E31: 0 - 3 mm
Variant	

### Performance

Configuration	0.25 : 1 Coax (50 Ohm)
Insulator	T: PTFE
Rated Current	4 Amps

### Specifications

Contact Type:	Coaxial 50 Ohm (Crimp)
Max. Matings:	5000
Contact Retention:	18 N
Contact Dia.:	0.7 mm (0.028in)
Bucket Dia.:	0.6 mm (0.024in)
Test voltage:	2.1 kV (rms)

R (max): 6.1 mOhm  
Vtest: 2100 V (AC), 3000 V (DC)  
□  
Impedance: 50 Ohm  
VSWR:  $1.09 + 0.11 * f/\text{GHz}$


## Others

Endurance (Shell): 5000 mating cycles  
F ret (min): 100 N  
IP Rating: 50

---

## DRAWINGS

### Draws

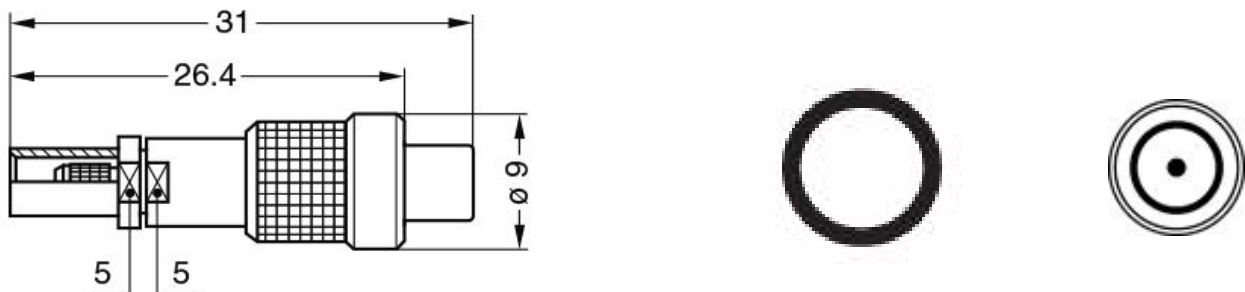

### Dimensions

	A	L	M
mm.	9	31	26.4
in.	0,35	1,22	1,04

---

## RECOMMENDED BY LEMO

### Tools

Crimp Tool: DPC.91.701.V

### Cables