




## MMBT3904-HF (NPN)

RoHS Device  
Halogen Free



### Features

- Epitaxial planar die construction
- As complementary type, the PNP transistor MMBT3904-HF is recommended

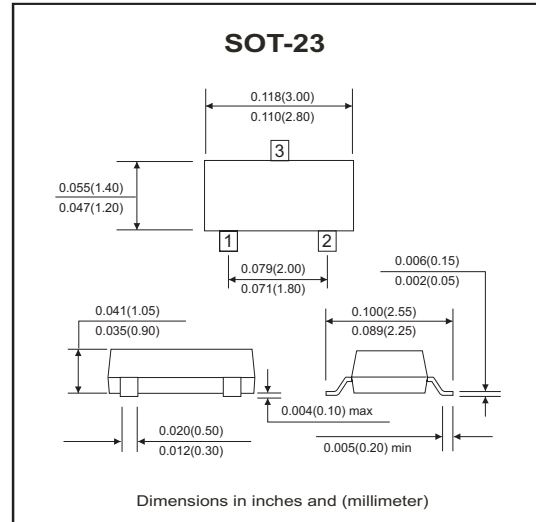

### Maximum Ratings (at TA=25°C unless otherwise noted)

| Parameter                                    | Symbol          | Min | Typ | Max  | Unit |
|--|-----------------|-----|-----|------|------|
| Collector-Base voltage                       | $V_{CBO}$       |     |     | 60   | V    |
| Collector-Emitter voltage                    | $V_{CEO}$       |     |     | 40   | V    |
| Emitter-Base voltage                         | $V_{EBO}$       |     |     | 6    | V    |
| Collector current-Continuous                 | $I_C$           |     |     | 0.2  | A    |
| Collector dissipation                        | $P_C$           |     |     | 0.2  | W    |
| Thermal resistance, junction to ambient      | $R_{\theta JA}$ |     |     | 625  | °C/W |
| Storage temperature and junction temperature | $T_{STG}, T_J$  | -55 |     | +150 | °C   |

### Electrical Characteristics (at TA=25°C unless otherwise noted)

| Parameter                            | Conditions                                 | Symbol        | Min | Max  | Unit    |
|--------------------------------------|--|---------------|-----|------|---------|
| Collector-Base breakdown voltage     | $I_C = 100\mu A, I_E = 0$                  | $V_{(BR)CBO}$ | 60  |      | V       |
| Collector-Emitter breakdown voltage  | $I_C = 1mA, I_B = 0$                       | $V_{(BR)CEO}$ | 40  |      | V       |
| Emitter-Base breakdown voltage       | $I_E = 100\mu A, I_C = 0$                  | $V_{(BR)EBO}$ | 6   |      | V       |
| Collector cut-off current            | $V_{CB} = 60V, I_E = 0$                    | $I_{CBO}$     |     | 0.1  | $\mu A$ |
| Collector cut-off current            | $V_{CE} = 30V, V_{BE(off)} = 3V$           | $I_{CEX}$     |     | 50   | nA      |
| Emitter cut-off current              | $V_{EB} = 5V, I_C = 0$                     | $I_{EBO}$     |     | 0.1  | $\mu A$ |
| DC current gain                      | $V_{CE} = 1V, I_C = 10mA$                  | $h_{FE(1)}$   | 100 | 400  |         |
|                                      | $V_{CE} = 1V, I_C = 50mA$                  | $h_{FE(2)}$   | 60  |      |         |
| Collector-Emitter saturation voltage | $I_C = 50mA, I_B = 5mA$                    | $V_{CE(sat)}$ |     | 0.3  | V       |
| Base-Emitter saturation voltage      | $I_C = 50mA, I_B = 5mA$                    | $V_{BE(sat)}$ |     | 0.95 | V       |
| Transition frequency                 | $V_{CE} = 20V, I_C = 10mA$<br>$f = 100MHz$ | $f_T$         | 300 |      | Mhz     |
| Delay time                           | $V_{CC} = 3.0V, V_{BE} = -0.5V$            | $t_d$         |     | 35   | nS      |
| Rise time                            | $I_C = 10mA, I_{B1} = 1.0mA$               | $t_r$         |     | 35   | nS      |
| Storage time                         | $V_{CC} = 3.0V, I_C = 10mA$                | $t_s$         |     | 200  | nS      |
| Fall time                            | $I_{B1} = I_{B2} = 1.0mA$                  | $t_f$         |     | 50   | nS      |

## RATING AND CHARACTERISTIC CURVES (MMBT3904-HF)

Fig.1 Typical pulsed current gain V.S. Collector current

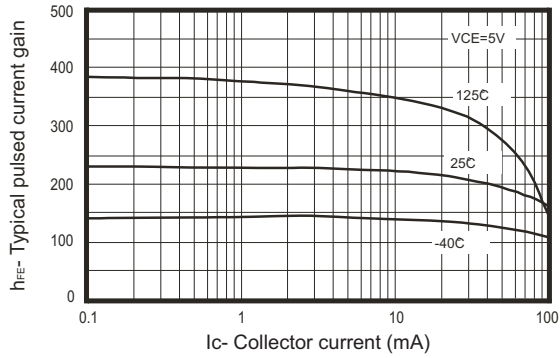


Fig.2 Collector-Emmitter saturation voltage V.S. Collector current

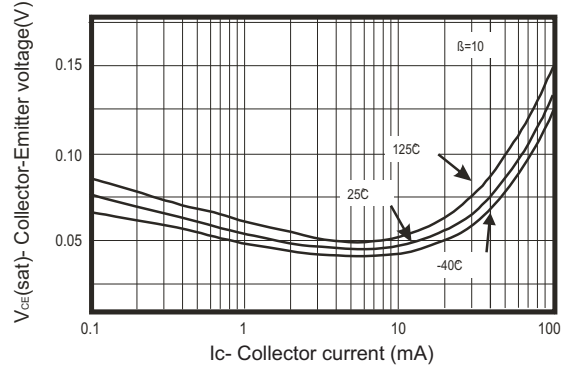


Fig.3 Base-Emmitter saturation voltage V.S. Collector current

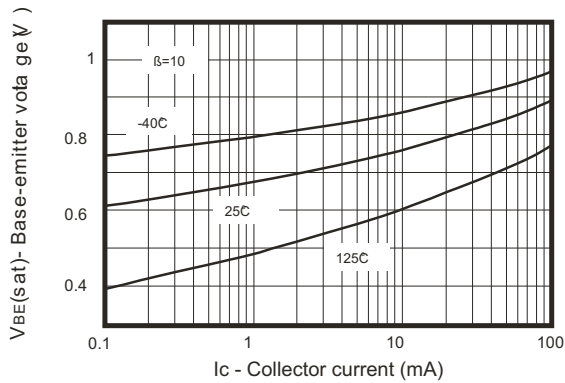


Fig.4 Base-Emmitter ON voltage V.S. Collector current

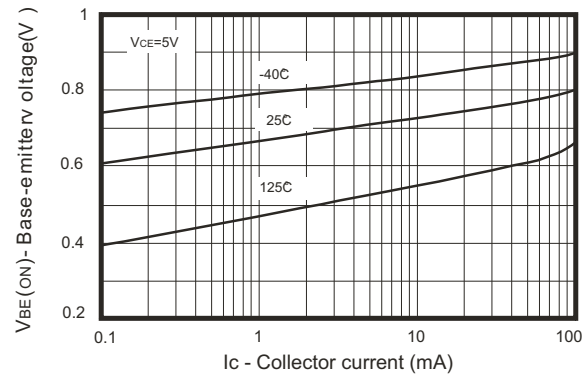


Fig.5 Collector-cutoff current V.S. Ambient temperature



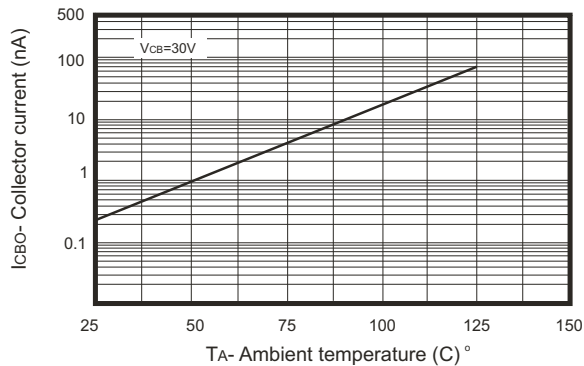


Fig.6 Capacitance V.S. Reverse bias voltage

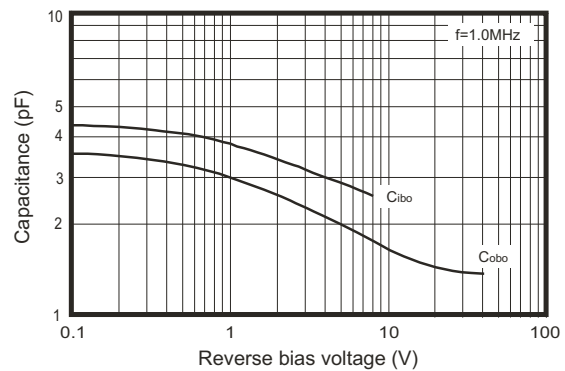

## Reel Taping Specification

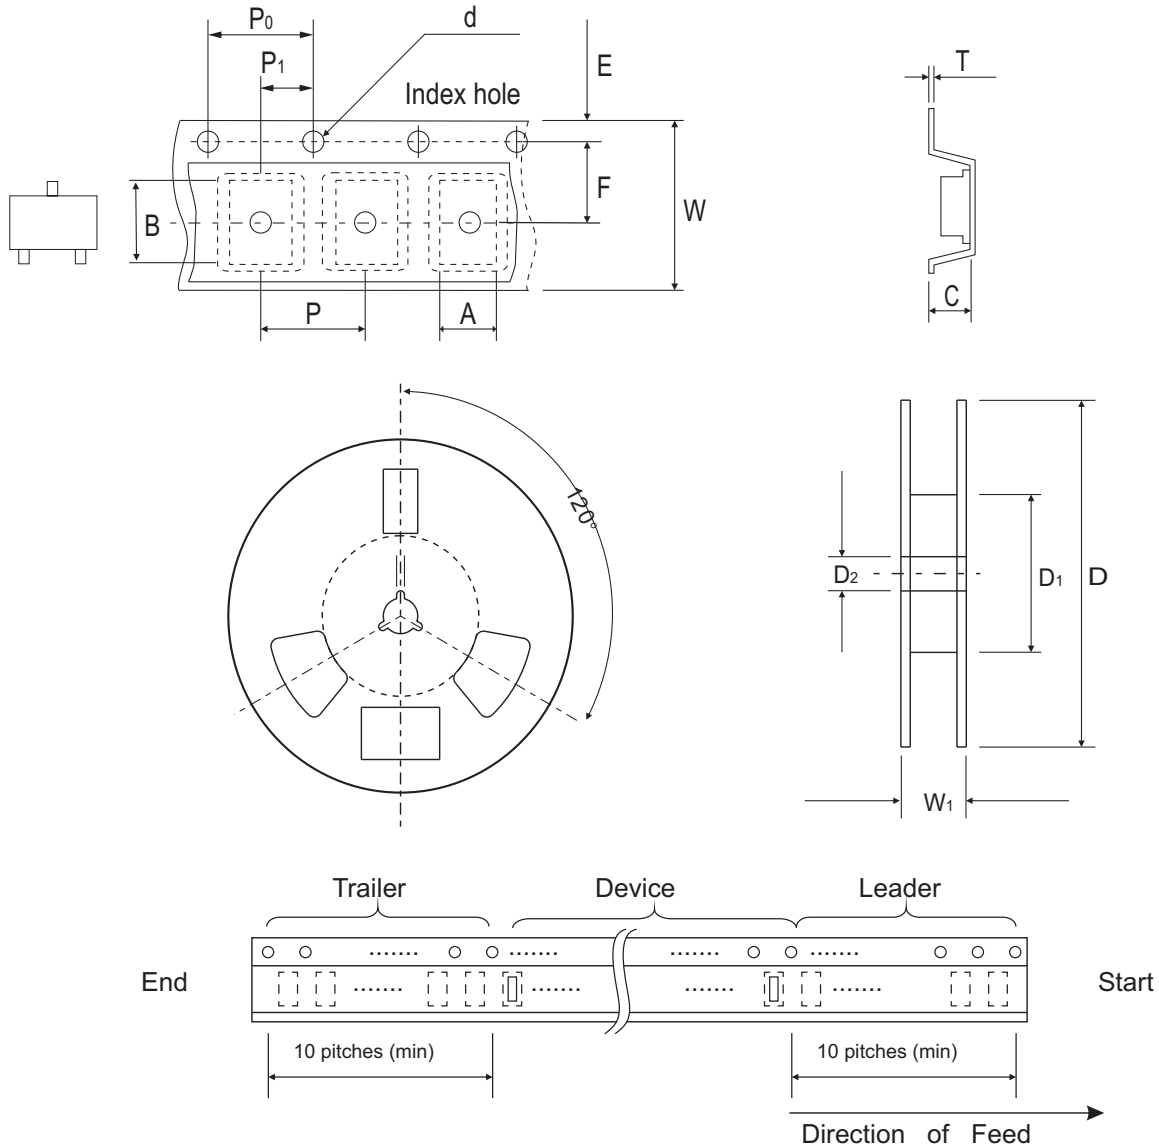


| SOT-23 | SYMBOL | A             | B             | C             | d             | D            | D <sub>1</sub> | D <sub>2</sub> |
|--------|--------|---------------|---------------|---------------|---------------|--------------|----------------|----------------|
|        | (mm)   | 3.10 ± 0.10   | 2.85 ± 0.10   | 1.40 ± 0.10   | 1.55 ± 0.10   | 178 ± 1      | 50.0 MIN.      | 13.0 ± 0.20    |
|        | (inch) | 0.122 ± 0.004 | 0.112 ± 0.004 | 0.055 ± 0.004 | 0.061 ± 0.004 | 7.008 ± 0.04 | 1.969 MIN.     | 0.512 ± 0.008  |

| SOT-23 | SYMBOL | E             | F             | P             | P <sub>0</sub> | P <sub>1</sub> | W             | W <sub>1</sub> |
|--------|--------|---------------|---------------|---------------|----------------|----------------|---------------|----------------|
|        | (mm)   | 1.75 ± 0.10   | 3.50 ± 0.05   | 4.00 ± 0.10   | 4.00 ± 0.10    | 2.00 ± 0.05    | 8.00 ± 0.30   | 14.4 MAX.      |
|        | (inch) | 0.069 ± 0.004 | 0.138 ± 0.002 | 0.157 ± 0.004 | 0.157 ± 0.004  | 0.079 ± 0.004  | 0.315 ± 0.008 | 0.567 MAX.     |


## Marking Code

| Park Number | Marking Code |
|-------------|--------------|
| MMBT3904-HF | 1AM          |



## Suggested PAD Layout

| SIZE | SOT-23 |        |
|------|--------|--------|
|      | (mm)   | (inch) |
| A    | 0.80   | 0.031  |
| B    | 0.95   | 0.037  |
| C    | 0.95   | 0.037  |
| D    | 2.02   | 0.080  |
| E    | 3.03   | 0.120  |

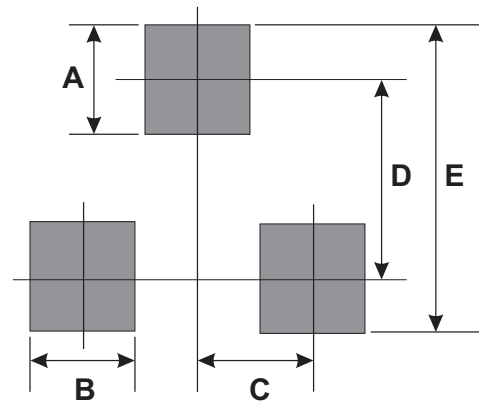

## Standard Packaging

| Case Type | Qty per Reel | Reel Size |
|-----------|--------------|-----------|
|           | (Pcs)        | (inch)    |
| SOT-23    | 3000         | 7         |