
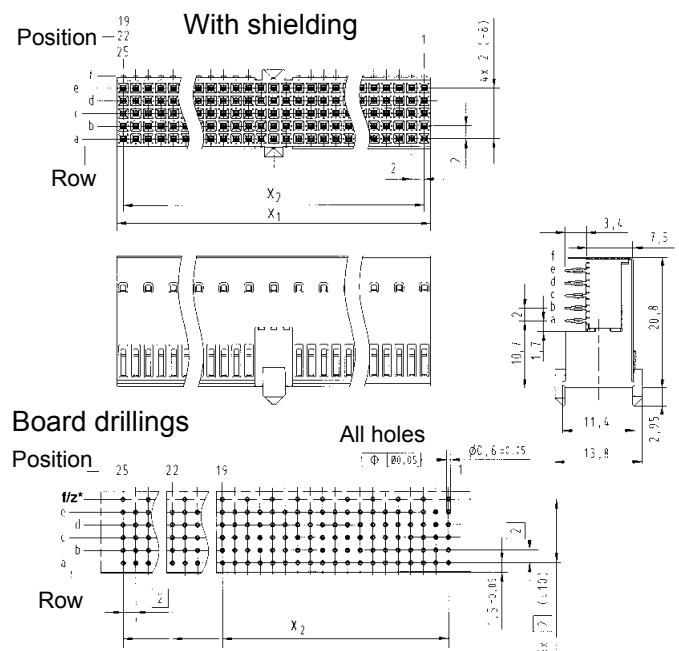


Female connectors, angled

Identification	No. of contacts	Contact length [mm]		Part number
			termination side	
Type AB ₁₉	95	3.4		17 33 095 1101 17 33 095 2101
Type AB ₁₉ with upper shield CompactPCI, Position RJ3	95	3.4		17 33 095 1102 17 33 095 2102
Lower shield for type AB ₁₉ connectors				17 33 000 4102
Type AB ₂₂	110	3.4		17 34 110 1101 17 34 110 2101
Type AB ₂₂ with upper shield CompactPCI, Positions RJ2, RJ5	110	3.4		17 34 110 1102 17 34 110 2102
Lower shield for type AB ₂₂ connectors				17 34 000 4102
Type AB ₂₅	125	3.4		17 35 125 1101 17 35 125 2101
Type AB ₂₅ with upper shield	125	3.4		17 35 125 1102 17 35 125 2102
Lower shield for type AB ₂₅ connectors				17 21 000 4102

Contact positions	X ₁	X ₂
19	37.9	18 x 2 (= 36)
22	43.9	21 x 2 (= 42)
25	49.9	24 x 2 (= 48)

Dimensions [mm]

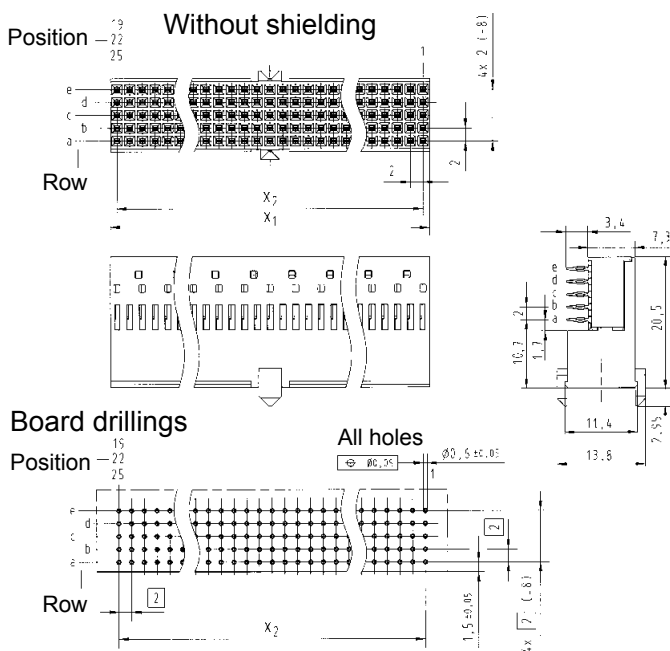

00
-
26

Thin print part numbers: performance level 1
Bold print part numbers: performance level 2

* hole on even contact numbers
 only needed for lower shielding