

MICRO SWITCH
a Honeywell Division


SWITCH - BASIC

BZ-2RW8072224286-A2

FED. MFG. CODE 91929

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BZ2RW8072224286A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM.

PRODUCT CODE: AQC8505

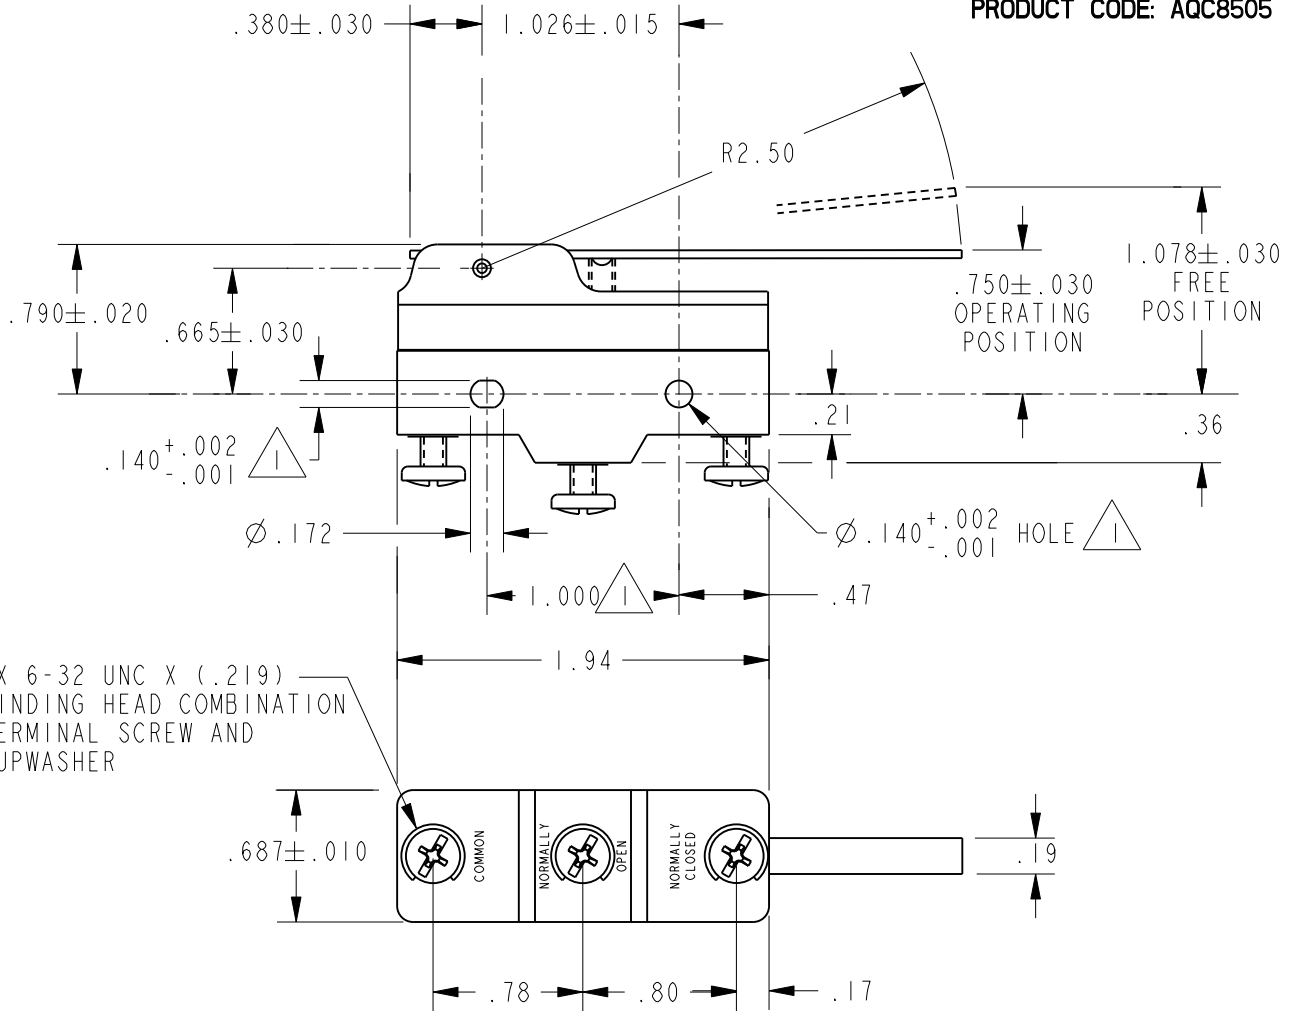

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF $250^{\circ}F$
- 3 - CONTACT MATERIAL: GOLD ALLOY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE	NONE	DO NOT SCALE PRINT
	CONTACT ARRANGEMENT S P D T L22 1A 125 VAC 	ONE PLACE (.0) $\pm .030$ TWO PLACE (.00) $\pm .015$ THREE PLACE (.000) $\pm .005$ ANGLES \pm WEIGHT .073 LB		
OPERATING FORCE----- 2 1/2 OZ MAX RELEASE FORCE----- 1/2 OZ MIN DIFFERENTIAL TRAVEL----- .007-.050 OVERTRAVEL----- .219 MIN	L288 L307 L315 1A 250 V \sim T85 25E3			

PTC / CAD 2D
 DRAWN
 C S L 3 SEP 03
 CHECK S A V 3 SEP 03
 CHECK R J 23 NOV 05
 MBH 09 DEC 08
 B 0046794
 SPK 23 NOV 05
 A 0016786
 REVISIONS
 ISSUE C
 M
 CATALOG LISTING
 BZ-2RW8072224286-A2
 PAGE 1 OF 1
 RELEASE NO. 0001362
 09 DEC 08
 RS
 X115057-BZ
 REPLACES