

Part Number: AT-3108



Features


Mylar cone speaker transducer
 P.C. Mounting - 17.5mm lead spacing
 31.9mm dia x 15.1mm high

Electrical Specifications


Weight	9.9 Grams
Case Material	ABS Black
Operating Temperature Range	-20 to +60 Deg C
Cone Material	Mylar
Rated Input	0.1 Watts
Maximum Input	0.2 Watts
Frequency Range	500 - 4,000 Hz
Impedance	8 +/- 20% Ohms

P.C. Pins: Tin plated copper

This device has been designed for a wide variety of applications where small size is important. The low profile and broad frequency range make it an ideal choices for keyboards, handheld instruments and other miniaturized systems

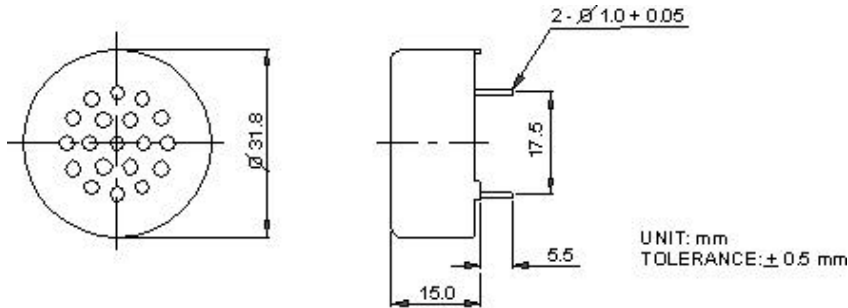

typical SPL vs. frequency

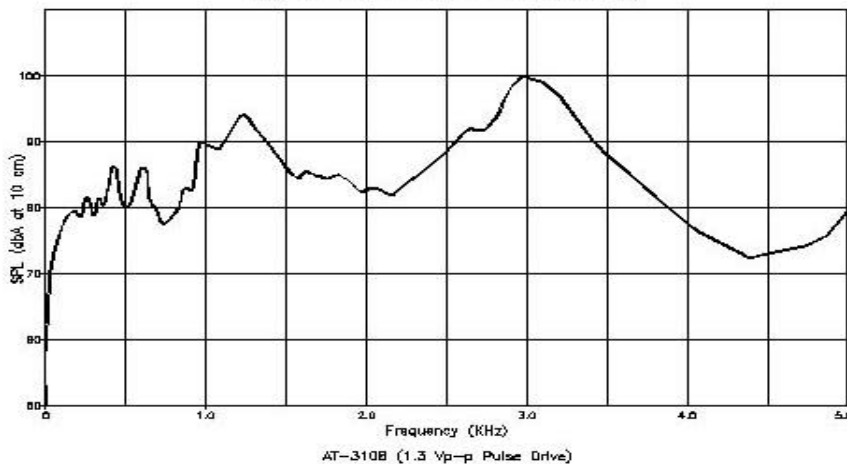

For application notes and detail drawing specifications, please consult www.projectsunlimited.com.

Specifications subject to change without notice.

© 2000, Projects Unlimited Inc., All Rights Reserved.