

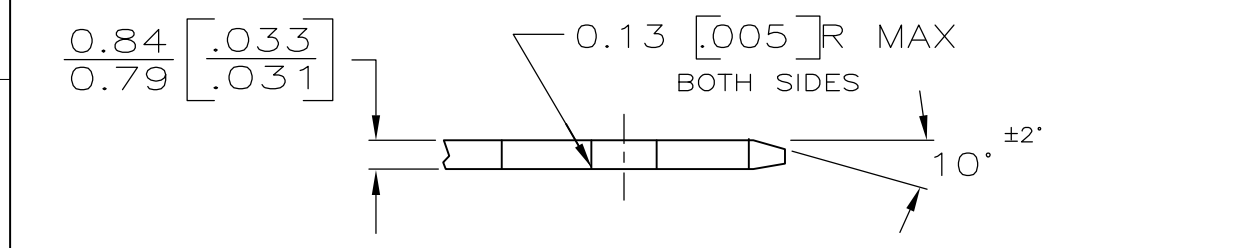


LOC		DIST		REVISIONS			
AF	50	P	LTR	DESCRIPTION	DATE	OWN	APVD
		G		REVISED PER ECR-11-018063	26DEC11	KH	PD



SUGGESTED MATING TAB

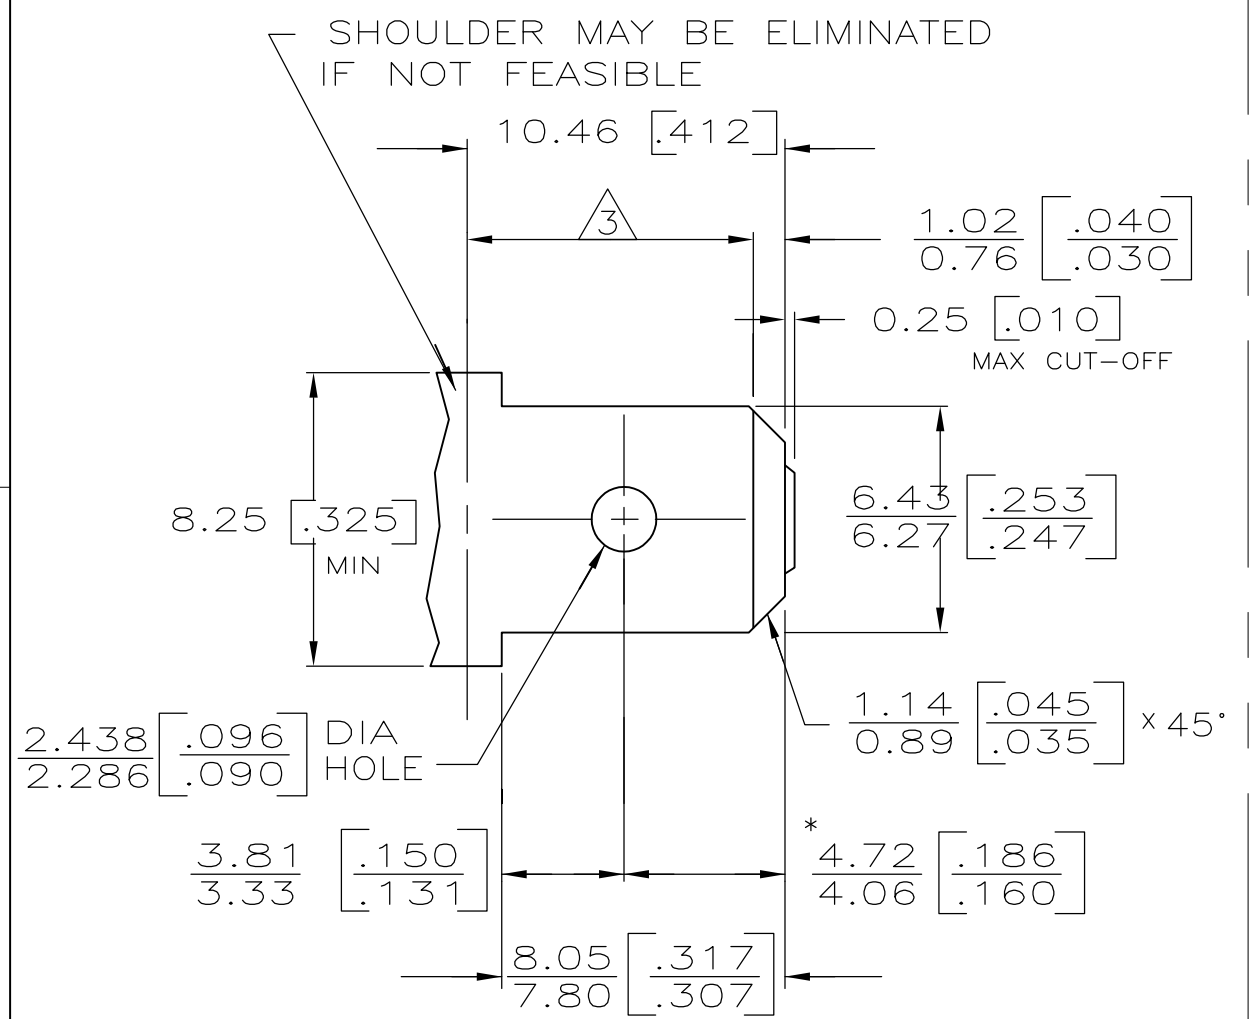

- 1 - MATL: 1/2H BRASS OR NICKEL PL STEEL.
 - 2 - NO BURRS PERMISSIBLE AT HOLE.
 - 3 - MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
 - 4 - TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMP. IS OVER 225° F.
 - 5 - HOLE MUST BE SYMMETRICAL ABOUT TAB Q WITHIN 0.076 [.003]
- * TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

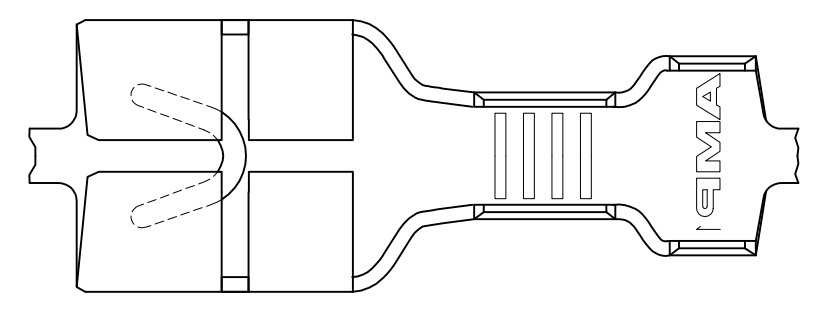

- 1 CONTINUOUS STRIP ON REELS
- 2 63563-1 SOLD TO FORD WITH FORD'S P/N ON REELING LABEL.
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

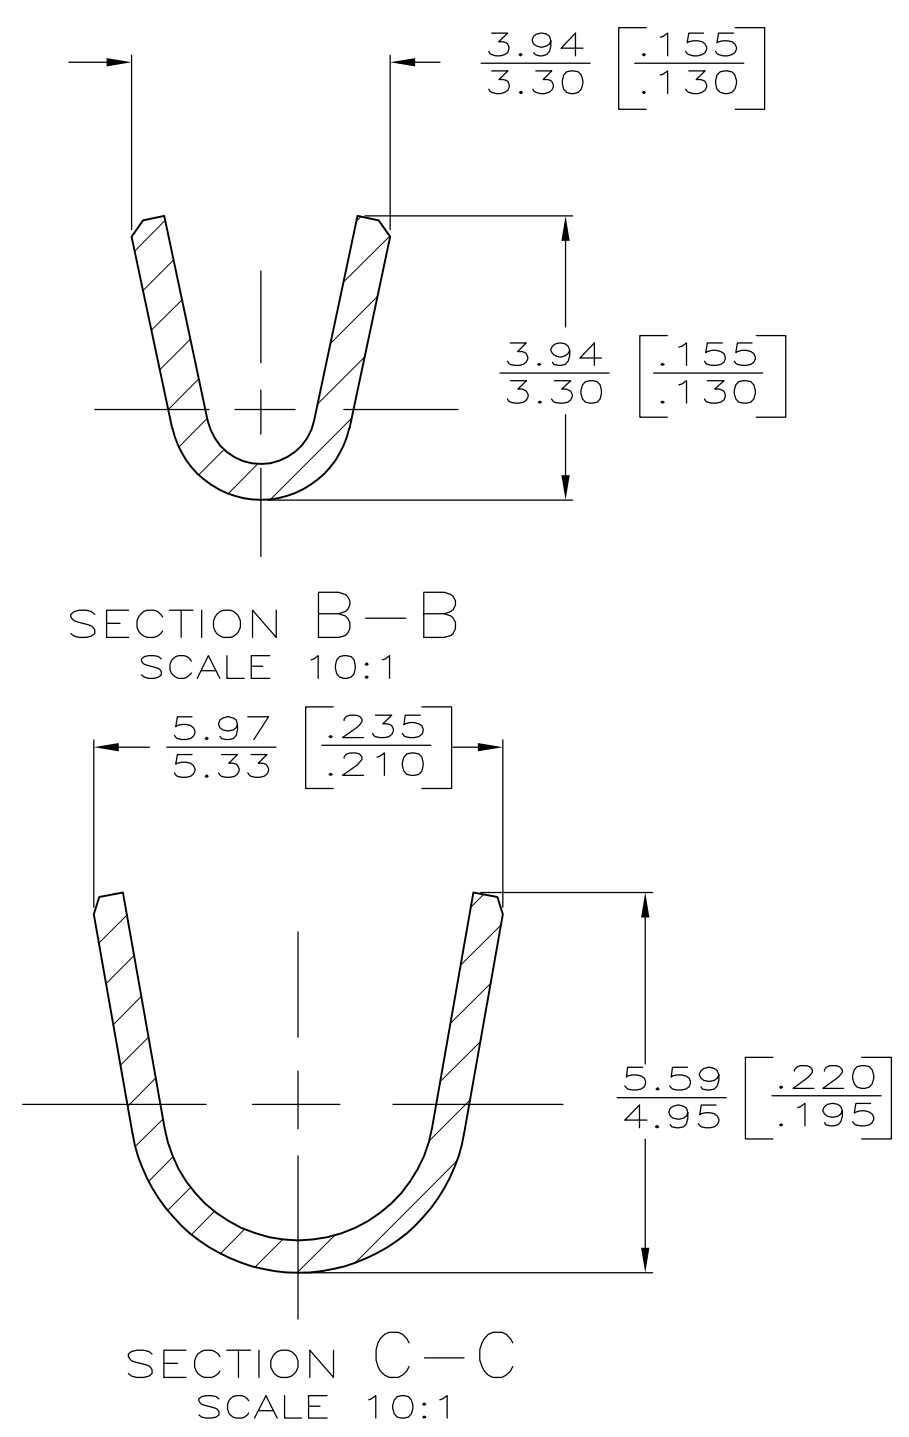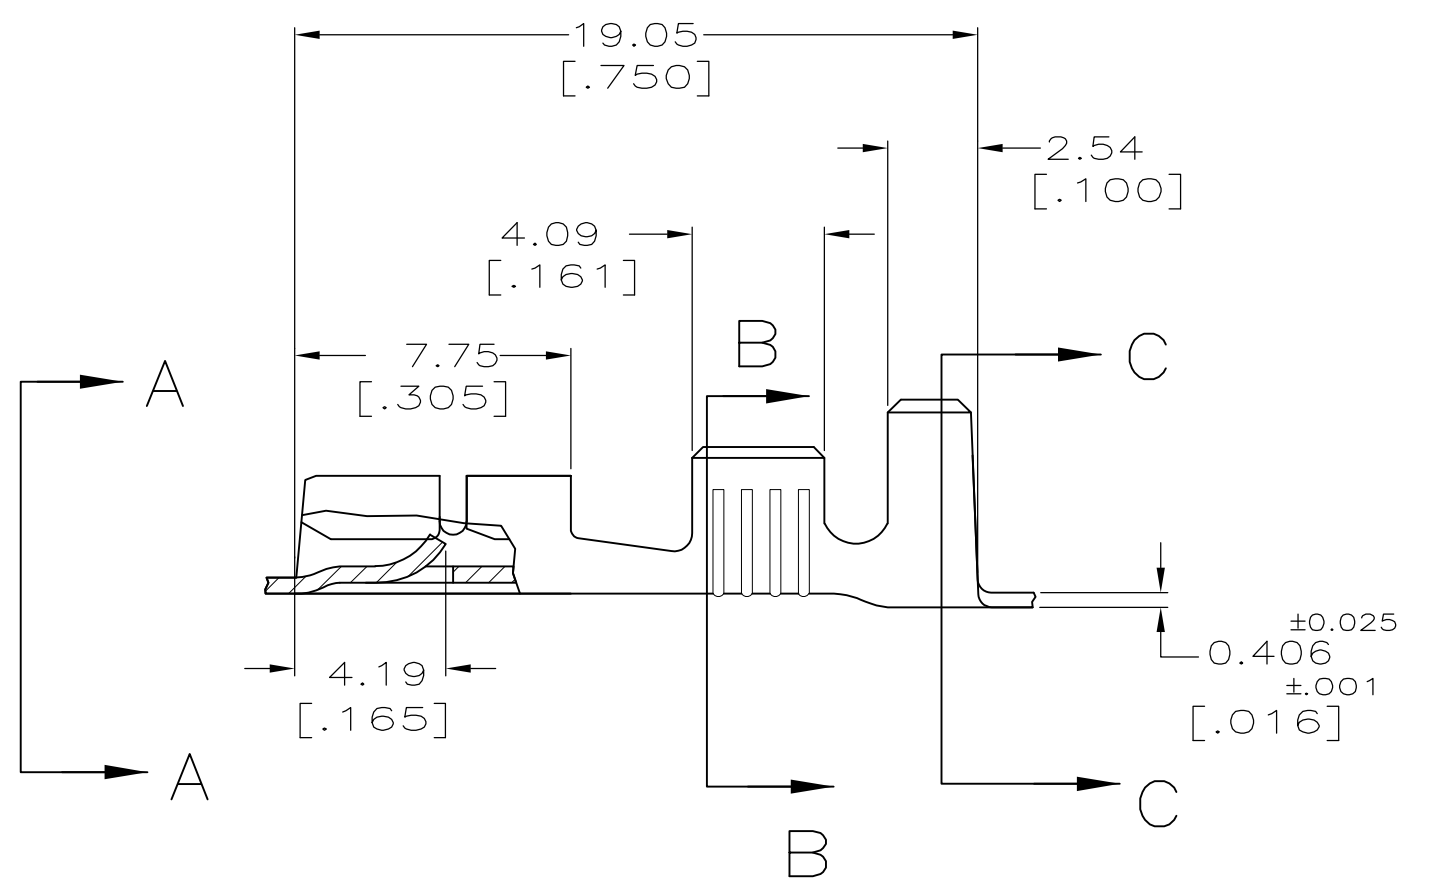

3	OBSOLETE	FODU14474BA	3.05-4.06 [.120-.160] DIA	0.8-2.0mm ² [18-14]AWG	0.813 [.032]	63563-2
		FORD P/N	INSULATION RANGE	WIRE SIZE	MATING TAB THK ±0.025 [.001]	63563-1
						PART NO

0	4.57 [.180]	6.4 [.252]	F	2.79 [.110]	1.803 [.07]	2.0mm ² [.14]	THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN JR RUTH 11/27/89	TE Connectivity RECPT, LOCK-ON, FASTON,™ 6.35 [.250] SERIES
					1.575 [.062]	1.3mm ² [.16]		CHK MS FEHER 11/27/89	
					1.422 [.056]	0.8mm ² [.18]		APVD J GILLESPIE 11/27/89	
TYPE	WIDTH	STRIP LENGTH ±0.38 ±[.015]	TYPE	WIDTH	±0.051 [±.002] HEIGHT	WIRE	PRODUCT SPEC	NAME	
INSUL BARREL CRIMP			WIRE BARREL CRIMP				APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	
							WEIGHT	A2 00779 G-63563	
							CUSTOMER DRAWING	RESTRICTED TO	
								SCALE 5:1 SHEET 1 of 1 REV G	