

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes


	From	To
Wire Sizes	4/0 AWG	4-3 AWG STR & 2 AWG SOLID
Wire Types	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Lengths	1-1/16 in.	1-5/16 in.
Panduit Color Code on Barrels	PURPLE	GRAY
Panduit Die Index No. on Barrels	P54	P29
Alternate Industry Die Index No. () on Barrels	(15)	(8)



CERTIFIED



LISTED Wire Connector

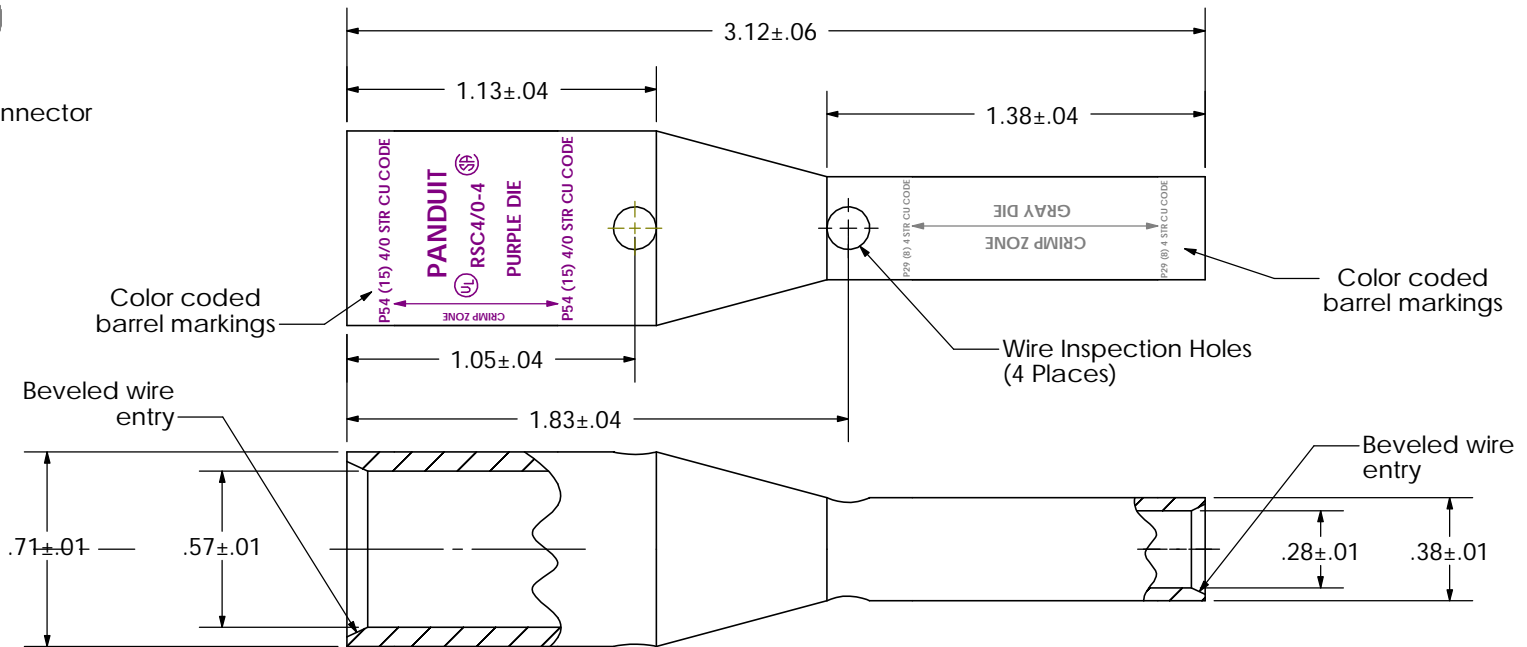

03	3/04	KLFU	KLFU	Wire size TO was: 4 AWG	11644
REV	DATE	BY	CHK	DESCRIPTION	ECN

PANDUIT CORP. TINLEY PARK, ILLINOIS

RSC4/0-4-X
Copper Reducing Splice With Inspection Holes

SCALE N/A DRAWING NO / CAD FILE RSC4_0-4-CUST