


SIGN	DATE	DESCRIPTION	APPROVER
△	2009.01.21	CUL approval added	Lee


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



Material

- Insulating body Thermoplastic (UL94V-0)
- Insulating cover Thermoplastic (UL94V-0)
- Terminal screw Steel Zinc plating M3
- Terminal body(house) Brass, Ni plated
- Wire guard PhBz , Tin plated

Electrical

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
- Torque: 4.5Lb-In
- Screw: M3
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- △ ● Safety Approval: 

RoHS Compliant

PART NUMBER:

OSTEOXX0100

No. of Poles

02: 2 Poles

:

:

24: 24 Poles


COLOR

0: Black (Standard)


5: Green

6: Blue

8: Grey

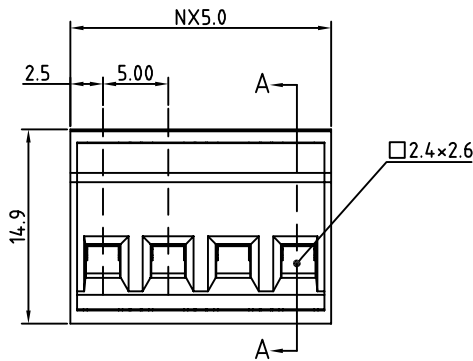

N=Number of poles

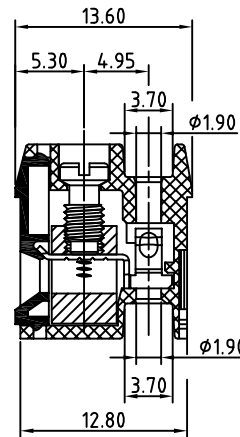

SECTION A-A



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTEO 5.0 series (A type ϕ 1.90mm)	
PART NO.	OSTEOXX0100	DWG NO.	OSTEOXX0100.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.10.13	Marvin 2006.10.13	Aaron 2006.10.13	Aaron 2006.10.13
SHEET: 01/01		Tolerance	
		UNIT: mm	X. \pm 0.50
		SCALE: NONE	X.X \pm 0.30
		REV: C	X.XX \pm 0.10
			X° \pm 1°