


Active partnumbers. Contact Tyco Electronics for other configuration availability.


old partnumber	Tyco P/N	corresponding standard P/N
V23529-S1105-W538	3-1393482-6	3-1393482-0 (V23529-S1105-C209)
V23529-S1105-W550	3-1393482-7	2-1393482-2 (V23529-S1105-B209)
V23529-S1105-W551	3-1393482-8	2-1393482-4 (V23529-S1105-B215)
V23529-S1105-W552	3-1393482-9	2-1393482-6 (V23529-S1105-B225)
V23529-S1105-W553	4-1393482-0	2-1393482-8 (V23529-S1105-B237)

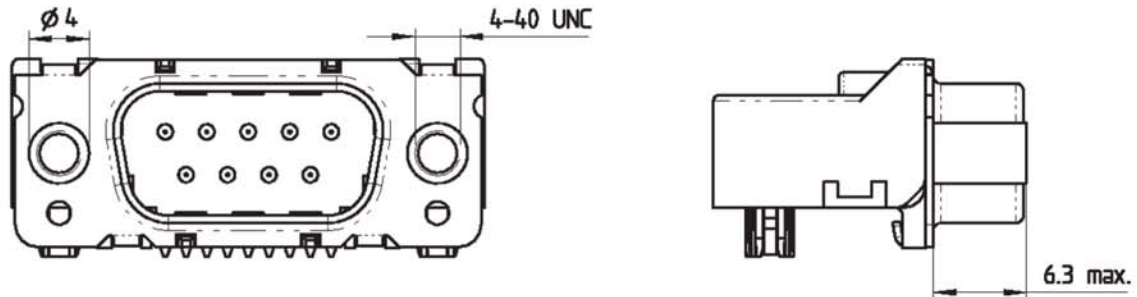

for missing dimensions, see the appropriate customer drawing:

	mounting height	
	standard V23529-R*****+****	Eurostyle V23529-S*****+****
male connector V23529-+*****-C***	2-1393481-5	1-1393482-4
female connector V23529-+*****-B***	2-1393481-1	1-1393482-2

Test setup to determine axial retention

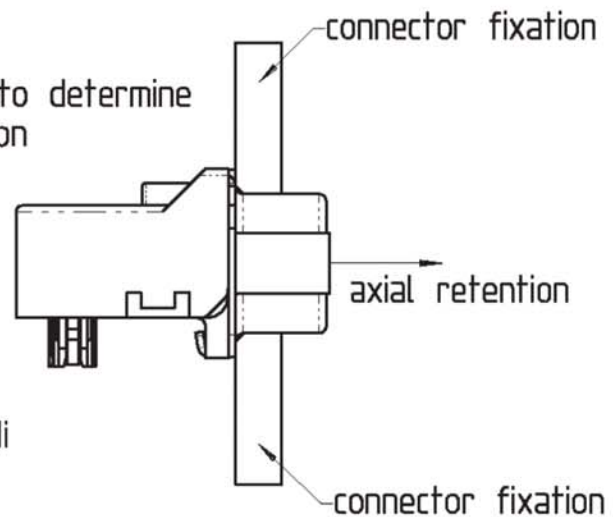

screwlocks:


torque retention: min 60Ncm

axial retention: min 60N

- CONTACT FINISH: Au or Au FLASH OVER PdNi
- PERFORMANCE LEVEL 2

tyco
Electronics

Tyco Electronics Corporation
Oostkamp - Belgium



Loc
GW DIMENSIONS
IN MM

SCALE 2:1

WEIGHT

MATERIAL

DATE Verougstraete
NAME 05 MAR 03
DEP. PE CC&CE

NAME

Customer drawing

D-Sub 90° press-fit with round screwlocks

TOLERANCE UNLESS
SPECIFIED OTHERWISE

NO.

3-1393482-6

SHT.

1

B ECO-12-004885 03 MAY 12 CWR
A SR10-0112-03 05 MAR 03 KV

REV. CHANGE ORDER DATE APP.

OF 1

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA, USA.

PROPRIETARY: