
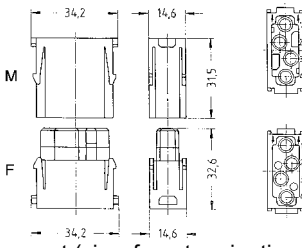

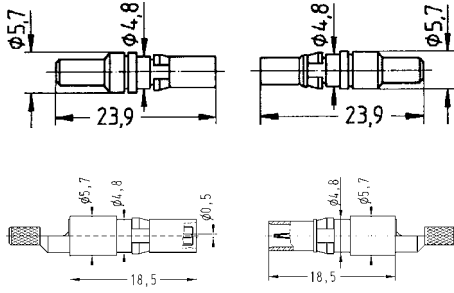





Number of contacts

# 4

1.5 A

Han-Modular

Identification	Impedance	Part number		Drawing Dimensions in mm																																																										
		male	female																																																											
Han-Modular®, Han® Multi module   Please order contacts separately.		09 14 004 4501	09 14 004 4512	 Contact arrangement (view from termination side)																																																										
Coaxial contact, Solder / crimp contact, acc. to DIN 41 626, gold plated contacts, contact resistance ≤3 Ohm  	50 Ohm 75 Ohm	09 14 000 6111 09 14 000 6121	09 14 000 6211 09 14 000 6221	 <table border="1"> <thead> <tr> <th rowspan="2">Wires</th> <th>Shell</th> <th rowspan="2">Internal wire</th> <th colspan="3">Dämpfung db/100 m bei</th> </tr> <tr> <th>∅</th> <th>100MHz</th> <th>200MHz</th> <th>800MHz</th> </tr> <tr> <td></td> <td>mm</td> <td>mm</td> <td></td> <td></td> <td></td> </tr> </thead> <tbody> <tr> <td><b>50 Ω</b></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RG 174 / U</td> <td>2.5</td> <td>0.48</td> <td></td> <td></td> <td>84</td> </tr> <tr> <td>RG 188 A / U</td> <td>2.6</td> <td>0.54</td> <td>29</td> <td>40</td> <td></td> </tr> <tr> <td>RG 316 / U</td> <td>2.5</td> <td>0.54</td> <td></td> <td>40</td> <td></td> </tr> <tr> <td><b>75 Ω</b></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>RG 179 B / U</td> <td>2.55</td> <td>0.3</td> <td></td> <td>41</td> <td></td> </tr> <tr> <td>RG 187 A / U</td> <td>2.7</td> <td>0.3</td> <td></td> <td>41</td> <td></td> </tr> </tbody> </table>	Wires	Shell	Internal wire	Dämpfung db/100 m bei			∅	100MHz	200MHz	800MHz		mm	mm				<b>50 Ω</b>						RG 174 / U	2.5	0.48			84	RG 188 A / U	2.6	0.54	29	40		RG 316 / U	2.5	0.54		40		<b>75 Ω</b>						RG 179 B / U	2.55	0.3		41		RG 187 A / U	2.7	0.3		41	
Wires	Shell	Internal wire	Dämpfung db/100 m bei																																																											
	∅		100MHz	200MHz	800MHz																																																									
	mm	mm																																																												
<b>50 Ω</b>																																																														
RG 174 / U	2.5	0.48			84																																																									
RG 188 A / U	2.6	0.54	29	40																																																										
RG 316 / U	2.5	0.54		40																																																										
<b>75 Ω</b>																																																														
RG 179 B / U	2.55	0.3		41																																																										
RG 187 A / U	2.7	0.3		41																																																										
F.O. contact, acc. to DIN 41 626   for 1 mm plastic fibre		20 10 001 4211	20 10 001 4221																																																											
F.O. contact, acc. to DIN 41 626   for GI fibre 50/125 µm or 62.5/125 µm ceramic ferrule		20 10 125 4212	20 10 125 4222																																																											
F.O. contact, acc. to DIN 41 626   for SI fibre (HCS®) 200/230 µm		20 10 230 4211	20 10 230 4221	