


- 1. SEE TABLE FOR MAXIMUM INSERTION LOSS AT 1310nm.
- 2. MINIMUM RETURN LOSS: 55dB
- 3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.

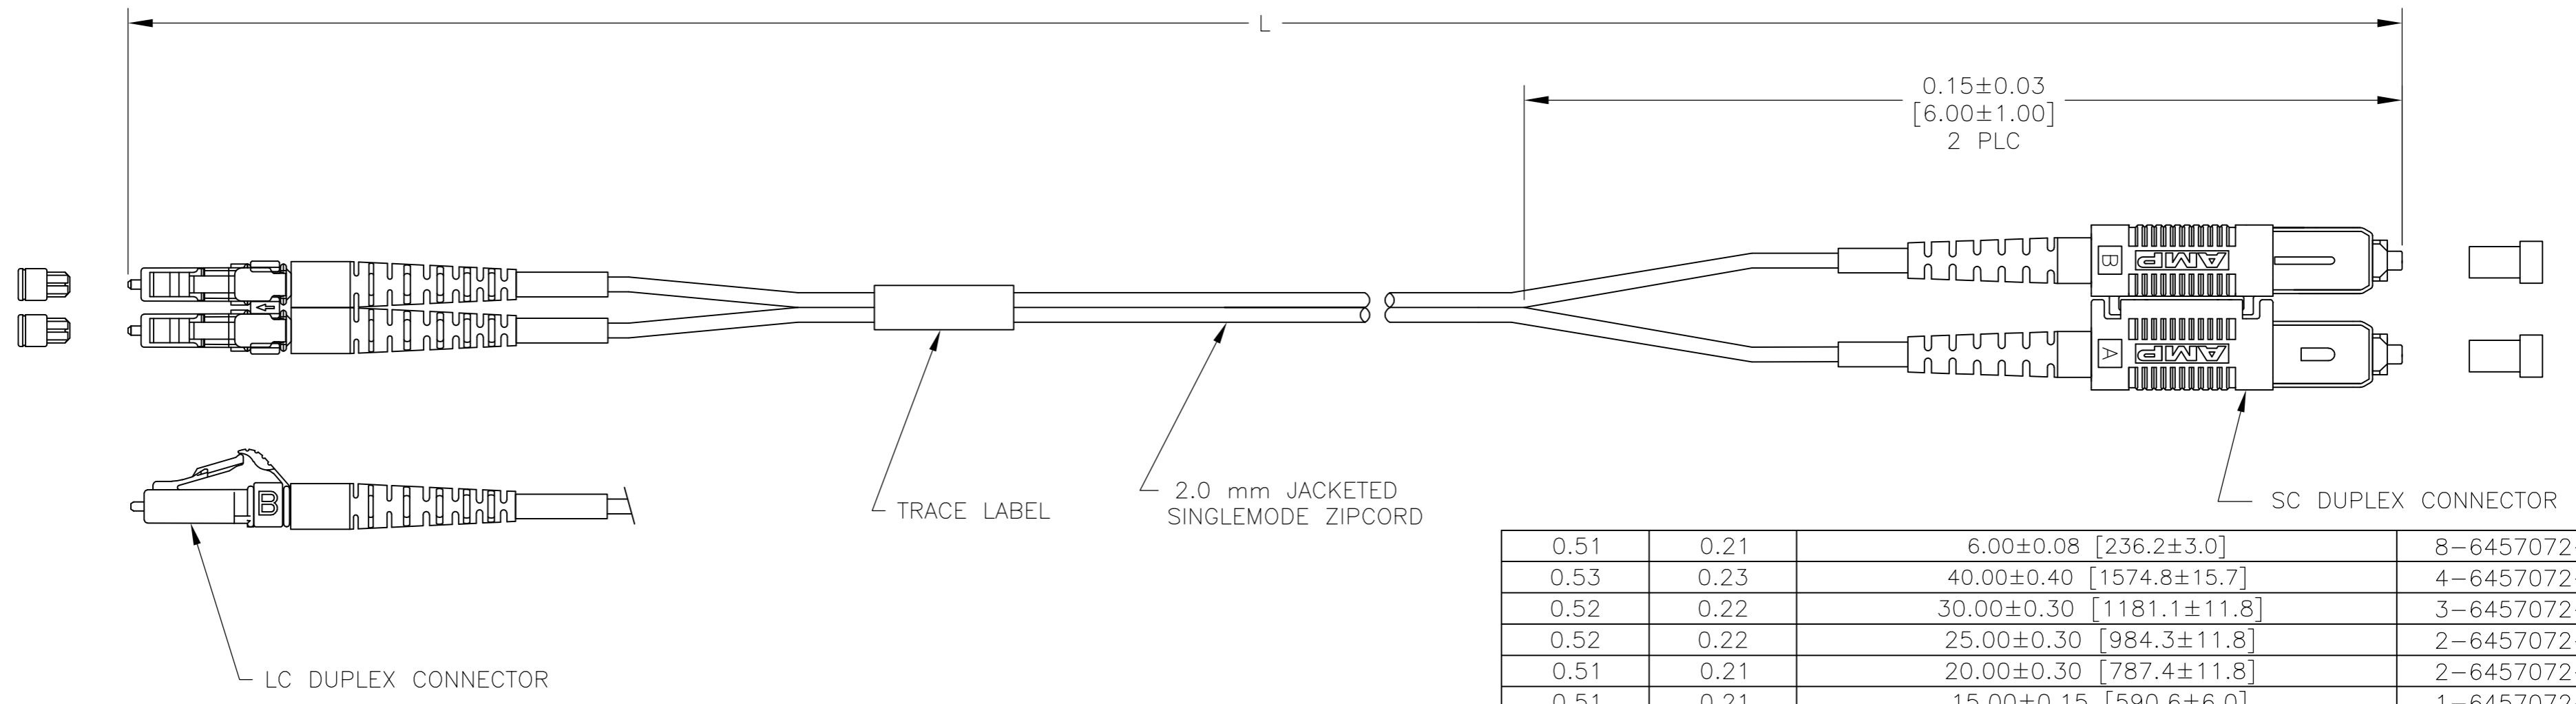

0.51	0.21	6.00±0.08 [236.2±3.0]	8-6457072-0
0.53	0.23	40.00±0.40 [1574.8±15.7]	4-6457072-0
0.52	0.22	30.00±0.30 [1181.1±11.8]	3-6457072-0
0.52	0.22	25.00±0.30 [984.3±11.8]	2-6457072-5
0.51	0.21	20.00±0.30 [787.4±11.8]	2-6457072-0
0.51	0.21	15.00±0.15 [590.6±6.0]	1-6457072-5
0.51	0.21	12.00±0.15 [472.4±6.0]	1-6457072-2
0.51	0.21	11.00±0.15 [433.1±6.0]	1-6457072-1
0.51	0.21	10.00±0.15 [393.7±6.0]	1-6457072-0
0.51	0.21	8.00±0.15 [315.0±6.0]	6457072-8
0.50	0.20	1.50±0.05 [59.1±2.0]	6457072-7
0.50	0.20	0.222 +0.038/-0.0 [8.00 +1.50/-0.0]	6457072-6
0.50	0.20	5.00±0.08 [196.9±3.0]	6457072-5
0.50	0.20	4.00±0.08 [157.5±3.0]	6457072-4
0.50	0.20	3.00±0.05 [122.8±2.0]	6457072-3
0.50	0.20	2.00±0.05 [78.7±2.0]	6457072-2
0.50	0.20	1.00±0.05 [39.4±2.0]	6457072-1
MAX IL SC	MAX IL LC	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	29SEP05	<b>STE</b> TE Connectivity					
		CHK	29SEP05						
		APVD	29SEP05						
DIMENSIONS: METERS [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME					
		0 PLC ± -		PRODUCT SPEC					
		1 PLC ± -		APPLICATION SPEC					
		2 PLC ± -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
		3 PLC ± -		WEIGHT	A2	00779	6457072	-	
4 PLC ± -		ANGLES ± ± -		CUSTOMER DRAWING					
MATERIAL		FINISH		SCALE	NTS	SHEET	1 of 1	REV	B3