


| | | | | | | | |
|-----|------|-----------|-----|-------------|-----------|-----|------|
| LOC | DIST | REVISIONS | | | | | |
| AI | - | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | BA | | NEW DRAWING | 23JAN2012 | DMS | ST.P |

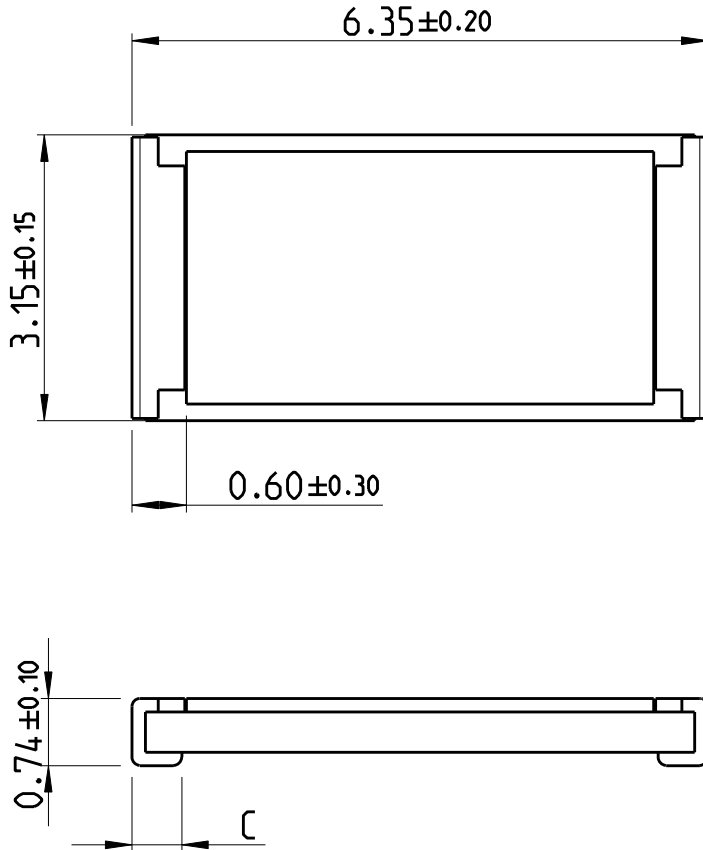


| VALUE RANGE | DIMENSION C |
|-------------|-------------|
| R010 - R099 | 0.55±0.25 |
| R10 - 1R0 | 2.10±0.10 |

NOTE:

1. DIMENSION C DEPENDANT UPON VALUE OF RESISTOR. SEE TABLE.
2. FOR FURTHER INFORMATION SEE DATA SHEET FOR CURRENT SENSING CHIP RESISTOR - RL73 SERIES

RoHS Compliant

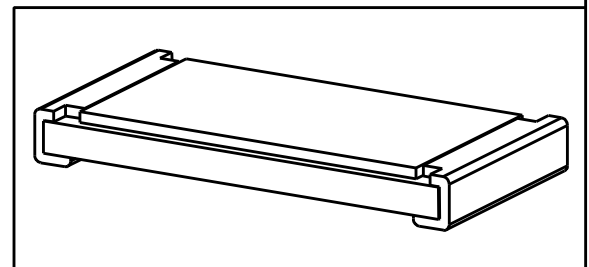

2011
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.
THIS DRAWING IS UNPUBLISHED.
COPYRIGHT 2011

| | | | | | | | | | |
|---|------------------|--------------|---|-----------|------------|---------------|--------|-----|----|
| DIMENSIONS: | DWN | 23JAN2012 | MATERIAL | FINISH | | | | | |
| mm | DARSHAN MS | | - | - | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK | 23JAN2012 | TE Connectivity | | | | | | |
| | ALLAN P | | | | | | | | |
| 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±5° | APVD | 23JAN2012 | NAME SMD LOW OHMIC CURRENT SENSE RESISTOR | | | | | | |
| | STEPHEN.P | | | | | | | | |
| | PRODUCT SPEC | - | SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO | | | |
| | APPLICATION SPEC | - | A 4 | 00779 | C-2176058 | - | | | |
| | WEIGHT | 0.05308 Gram | SCALE | | 12:1 | SHEET | 1 OF 1 | REV | BA |
| CUSTOMER DRAWING | | | | | | | | | |