


P1


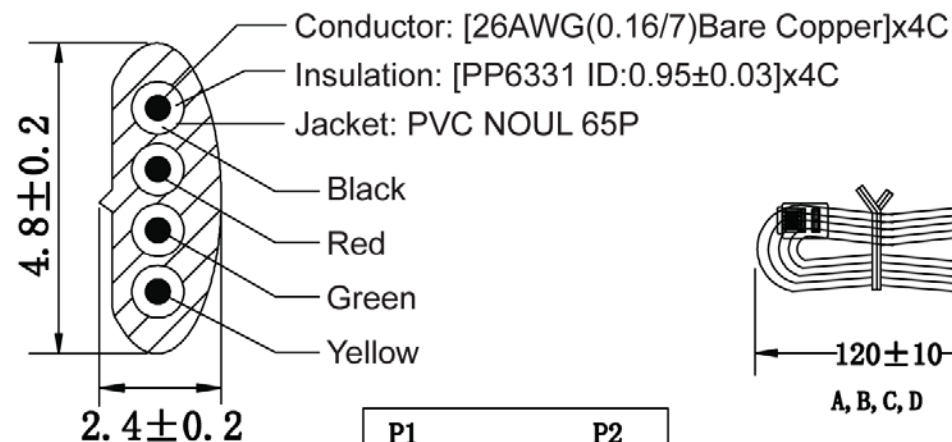


Conductor: [26AWG(0.16/7)Bare Copper]x4C
 Insulation: [PP6331 ID:0.95±0.03]x4C
 Jacket: PVC NOUL 65P

Black
 Red
 Green
 Yellow

SEC:A-A

P1	P2
1 BLACK	1
2 RED	2
3 GREEN	3
4 YELLOW	4



Note:
 • Material: Housing-polycarbonate, clear
 Terminal-0.36[.014] thick phosphor bronze.
 Thick gold in localized gold plate.
 Area, Gold Flash over the remainder.
 Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-4/4/S-5-OE	A	1,525±20(5ft)	Silver	1,525-1,535mm
AT-S-26-4/4/S-7-OE	B	2,135±30(7ft)	Silver	2,135-2,145mm
AT-S-26-4/4/S-10-OE	C	3,050±60(10ft)	Silver	3,050-3,060mm
AT-S-26-4/4/S-12-OE	D	3,660±60(12ft)	Silver	3,660-3,670mm
AT-S-26-4/4/S-14-OE	E	4,270±60(14ft)	Silver	4,270-4,280mm
AT-S-26-4/4/S-25-OE	F	7,625±100(25ft)	Silver	7,625-7,635mm
AT-S-26-4/4/S-50-OE	G	15,250±150(50ft)	Silver	15,250-15,260mm

Unit: mm



Scale	Free				Date	Name
TOLERANCE					Drawn	28.06.13 Wilson
X.	±X				Approved	28.06.13 Groll
X.X	±X					
X.XX	±X					
DIM	TOL					
X.°	±X°					
X.X°	±X°					
Angle	TOL	Id.	Modification	Date	Name	



Title Modular cable - Straight/Open 4P4C 50µ", 26AWG, Silver, 5-50 feet	
ASSMANN WSW-No. AT-S-26-4/4/S-xx-OE	
Drawing-No.	rev00
Replace	Sheet 1/1