

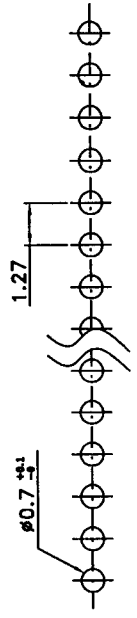


**SPECIFICATIONS**

Current Rating: 1 Amps  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°--+105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 © Standard: Nylon-6T

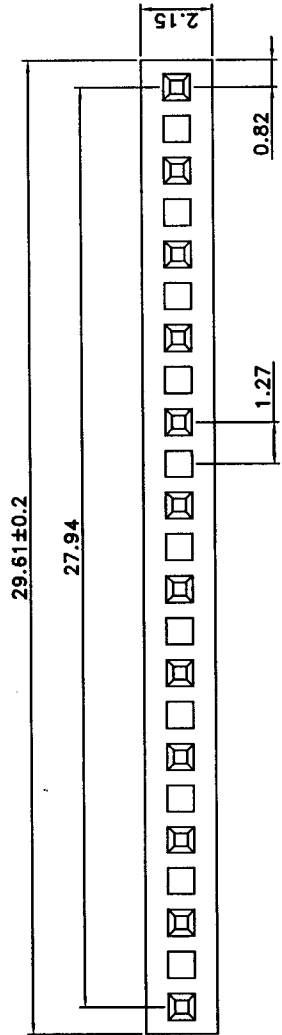

P.C.B LAYOUT

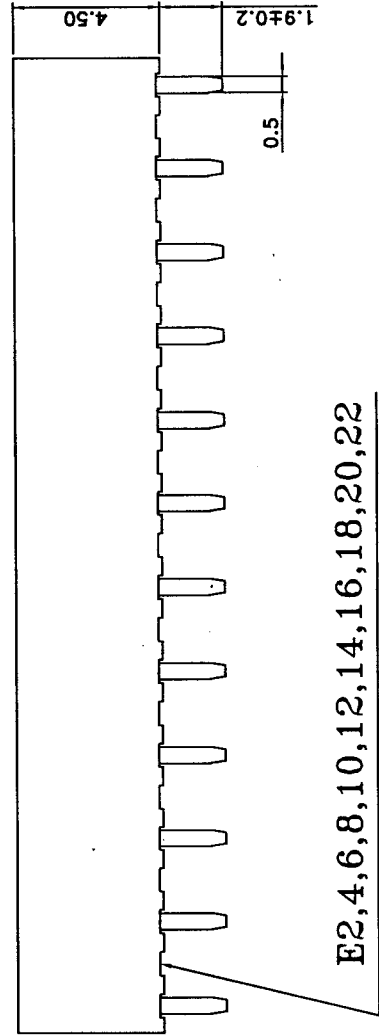

E2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22

需测量的重要尺寸	测量工具
PITCH: 1.27±0.05mm	PCB 测试板
DIP: 1.9±0.2mm	游标卡尺

**繼德工業股份有限公司**  
**Neltron Industrial Co., Ltd.**

DESCRIPTION:	1.27MM CENTER SINGLE ROW PCB SOCKET	SIZE	A4
	PART NO:		

GENERAL TOLERANCE:	.X = ±0.2 .XX = ±0.15	DRAWN:	JACK
UNIT: MM		CHECKED:	
SCALE:		APPROVAL:	JACK BY
SHEET: 1 / 1		DATE	FILE
PROJECTION:		REV	