


1 2 3 4 5 6 7

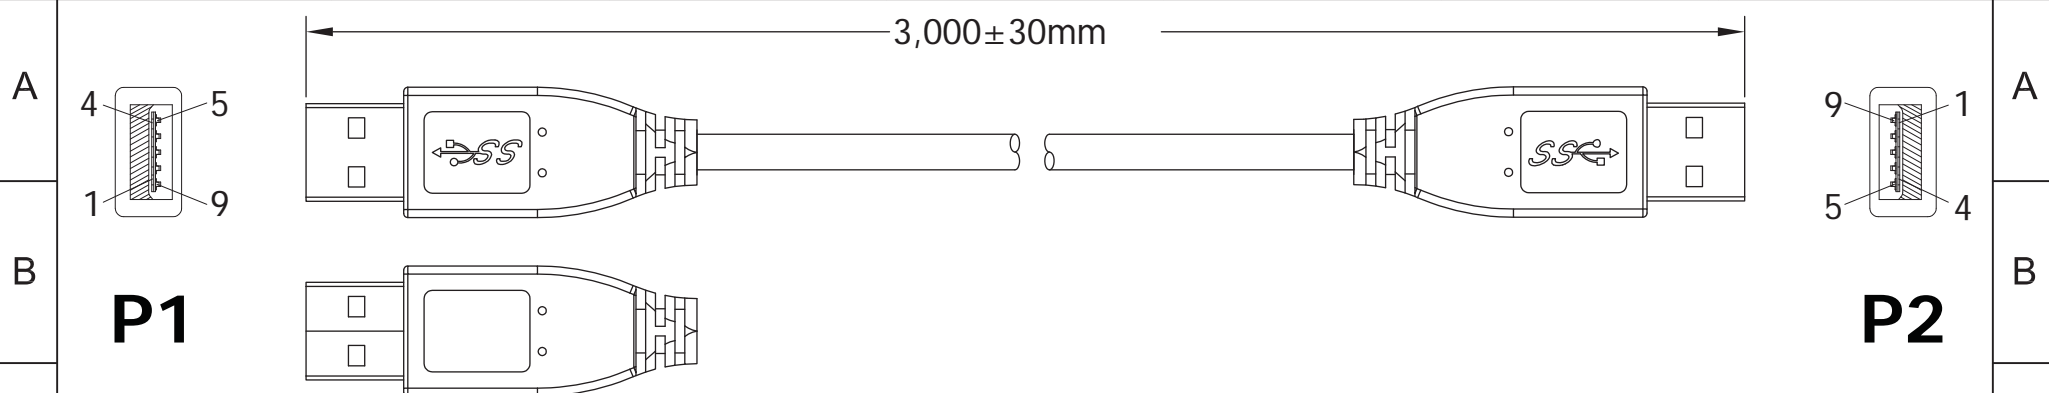

Material:

- Cable: UL-2725 [#28(7/0.1 27 T.C)*1P INS:Foam-PE+D.W (7/0.127 T.C)+AL/MY+Hot-melt-Mylar]*2C+#28(7/0.127 T.C)*1P INS:Polyolefin + #28(7/0.127 T.C)*2C INS:Polyolefin + AL/MY +B.D(85%)
- PVC Jacket
- OD: 5.2±0.15MM
- Color: Black
- P1 & P2 Connectors: USB 3.0 A Male 9 Pin
 - Contact: 30μ"
 - Shell: Ni-Plated
- Hood: Molded Type, PVC 45P (Black)

PIN OUT	
P1	P2
1 RED	1 VCC
2 WHITE	2 -DATA
3 GREEN	3 +DATA
4 BLACK	4 GND_PWRrt
5 BLUE	8 SDP1-
6 YELLOW	9 SDP1+
7 D.W	7 SDP1_Drain
8 PURPLE	7 SDP2_Drain
9 ORANGE	5 SDP2-
SHELL B.D	6 SDP2+
SHELL	SHELL

- PVC Jacket
 - OD: 5.2±0.15MM
 - Color: Black
 - P1 & P2 Connectors: USB 3.0 A Male 9 Pin
 - Contact: 30μ"
 - Shell: Ni-Plated
 - Hood: Molded Type, PVC 45P (Black)
- Electrical:**
- 100% Open short & mis wire test
 - Contact Resistance: 3Ω Max.
 - Insulation Resistance: 10MΩ Min.
 - Hi-Pot 300V DC

G	Scale	Free				Date	Name	Title USB 3.0 cable A type Male to Male, 9 pin, 3 Meters	
	TOLERANCE					Drawn	Wilson		
H	Unit: mm	X.	±0.3				Approved	Groll	ASSMANN WSW-No. AK670/3-3
		X.X	±X						Drawing-No.
		X.XX	±X						rev00
		DIM	TOL						Replace
		X.°	±X°						Sheet
	X.X°	±X°						1/1	
	Angle	TOL	Id.	Modification	Date	Name			



1 2 3 4 5 6 7